


Ezi-servo

9、Input/Output 信號 (CN1)

NO.	Function	In/O
1	CW+(Pulse+)	Input
2	CW-(Pulse-)	Input
3	CCW+(Dir+)	Input
4	CCW-(Dir-)	Input
5	A+	Output
6	A-	Output
7	B+	Output
8	B-	Output
9	Z+	Output
10	Z-	Output
11	Alarm	Output
12	In-Position	Output
13	Servo On/Off	Input
14	Alarm Reset	Input
15	NC	----
16	BRAKE+	Output
17	BRAKE-	Output
18	S-GND	Output
19	24VDC GND	Input
20	24VDC	Input

※BRAKE function is optional

※There is no BRAKE function for 86mm motor drive.

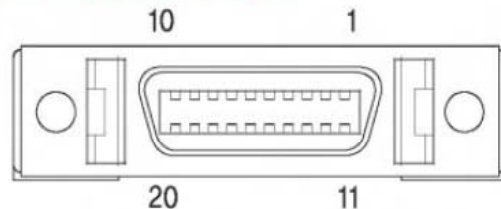

ACE-SXE

18 Pin 2mm Connector Pin Outs

Pin #	Name	Description
1	GND	GND of controller
2	5V	5V output from controller
3	/EA	Differential encoder /A channel input
4	EA	Differential encoder A channel input
5	/EB	Differential encoder /B channel input
6	EB	Differential encoder B channel input
7	/EZ	Differential encoder /Z channel input
8	EZ	Differential encoder Z channel input
9	PUL-	Differential negative pulse output
10	PUL+	Differential positive pulse output
11	DIR-	Differential negative direction output
12	DIR+	Differential positive direction output
13	5V	5V output from controller
14	ENA	Open-collector enable output
15	AI2	Analog input 2
16	AI1	Analog input 1
17	485-	RS-485 – signal
18	485+	RS-485 + signal

腳位對照

Ezi-servo

ACE-SXE

1

10

2

9

3

12

4

11

5

4

6

3

7

6

8

5

9

8

10

7

