


Nanomaterials on energy applications

Advantages of nanomaterials

Very large difference in physical and chemical properties when the sizes of materials were down to nanoscale.

Advantages :


1. Large surface area
2. High reactivity
3. Lower cost

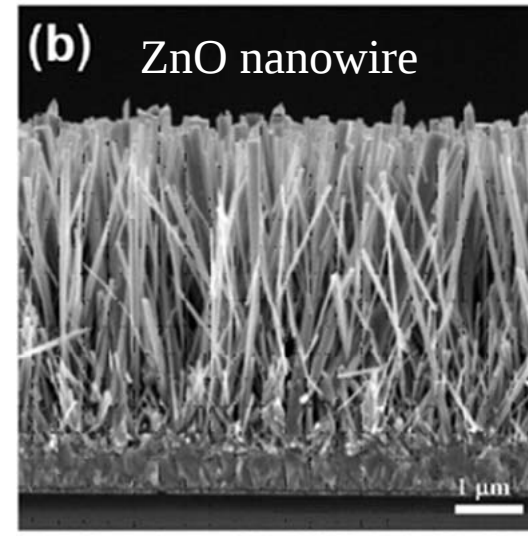

Wu, J. J., et al., Appl. Phys. Lett. 2007, 91, 093117

Nanomaterials on energy applications

Solar cell

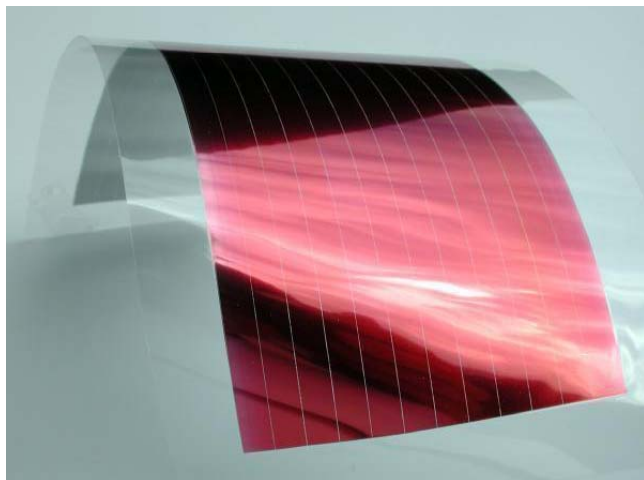


Fuel Cell



<http://www.chenyo.com/sitebuilder/page2.php?view=preview&image=17&category=3>

Water Splitting

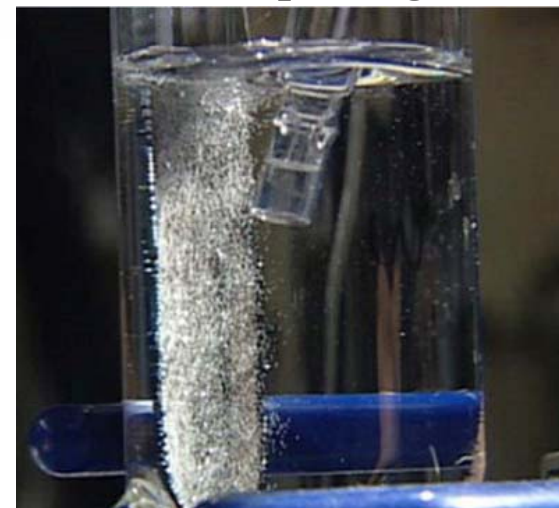


Plug into the Sun







Dye Sensitizer Solar Cell

Solar spectrum

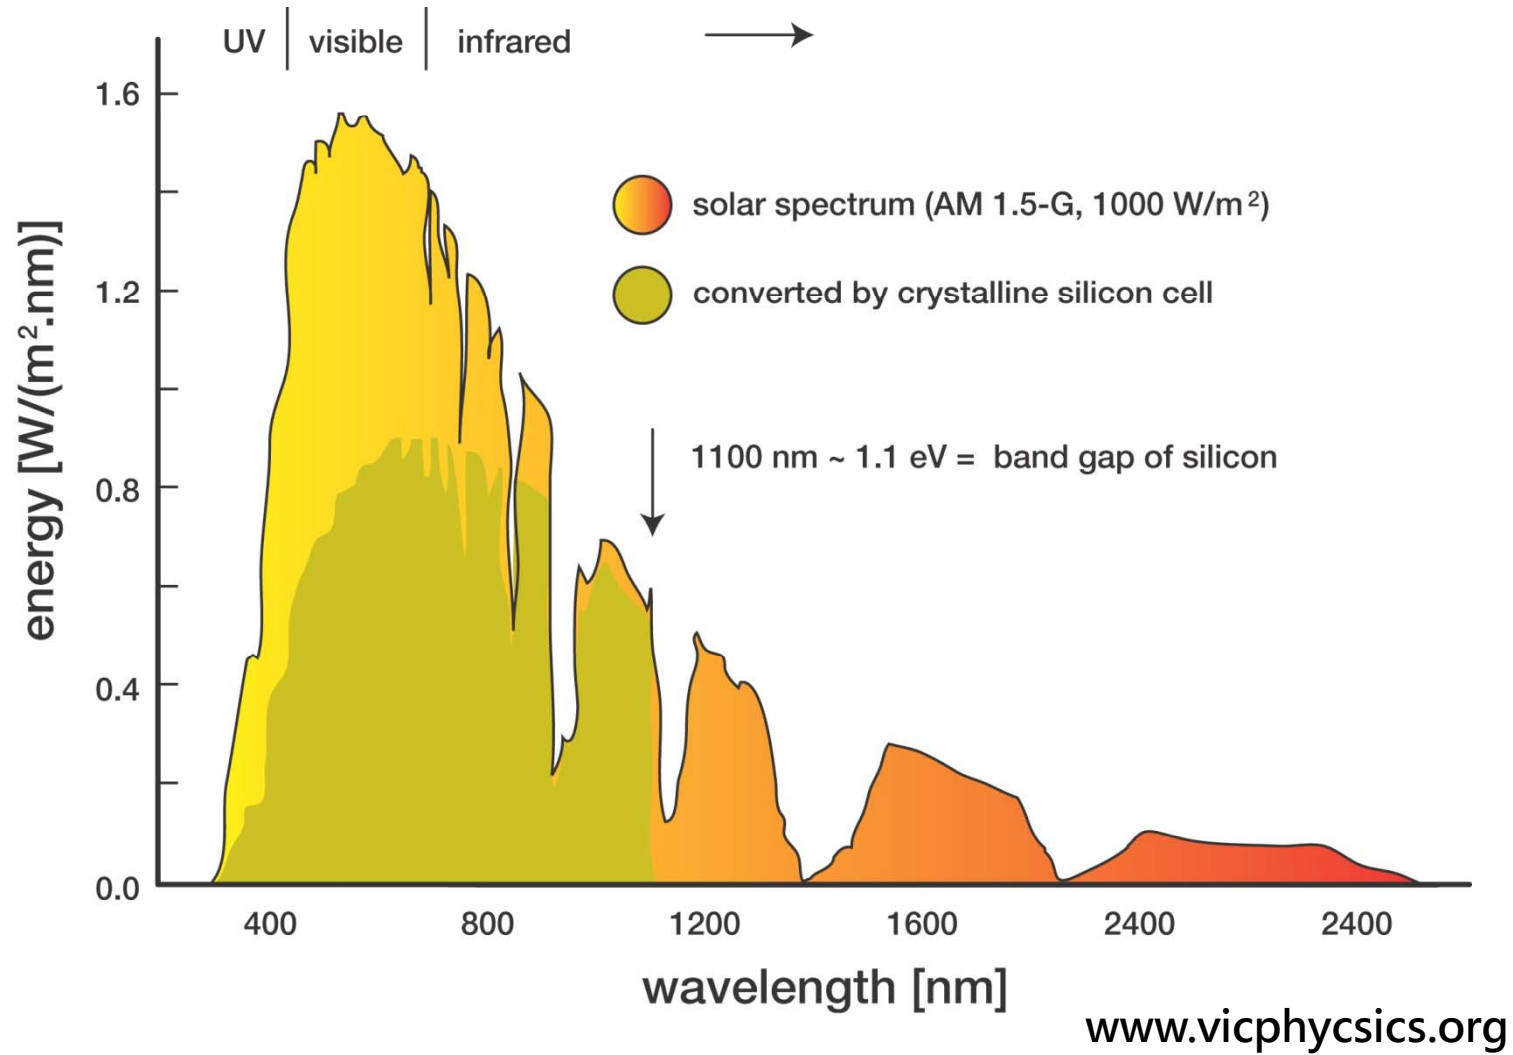

How dose photons be converted to electrons?

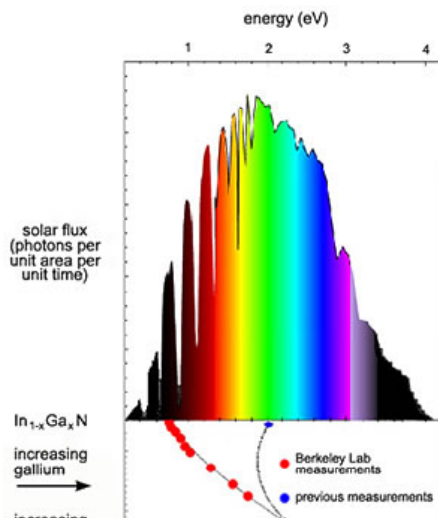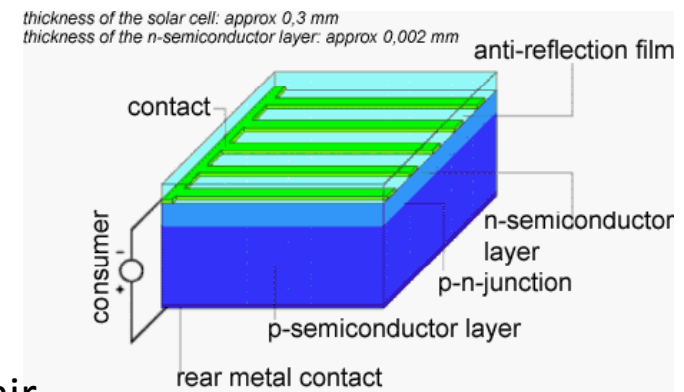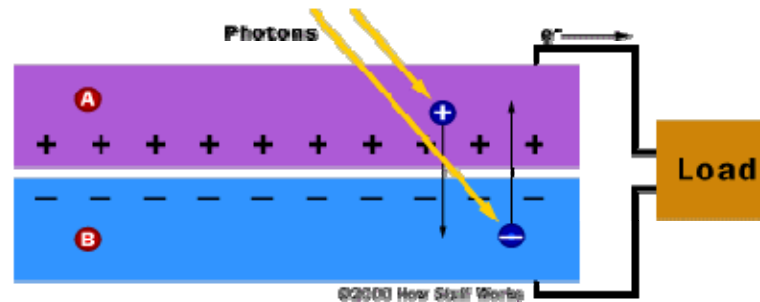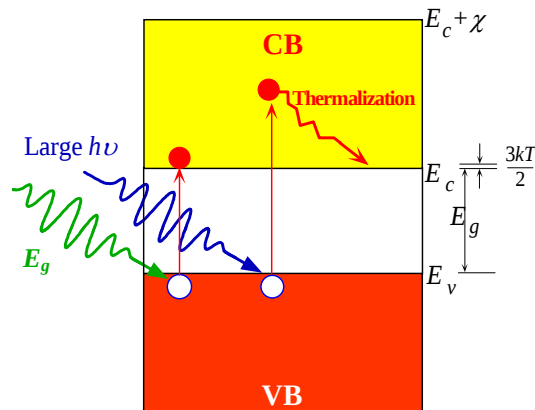

1. Absorption
2. Electron(-) and hole(+) pair (transport)
3. Current-voltage (Electricity)

Very simple device architecture compared to IC !

Solar cell generations

1st generation
Si based solar cell




www.en.wikipedia.org

2nd generation
Thin film solar cell



www.pinheng-technology.com

3rd generation
Organic solar cell

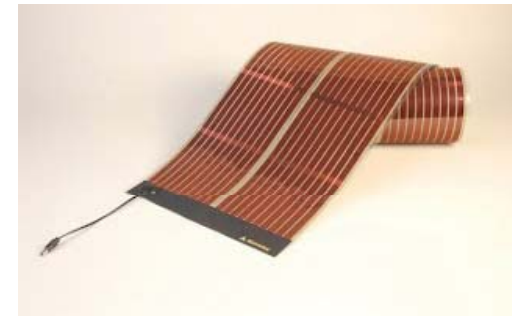

www.pinheng-technology.com

1st generation : Si based solar cell

Silicon mineral


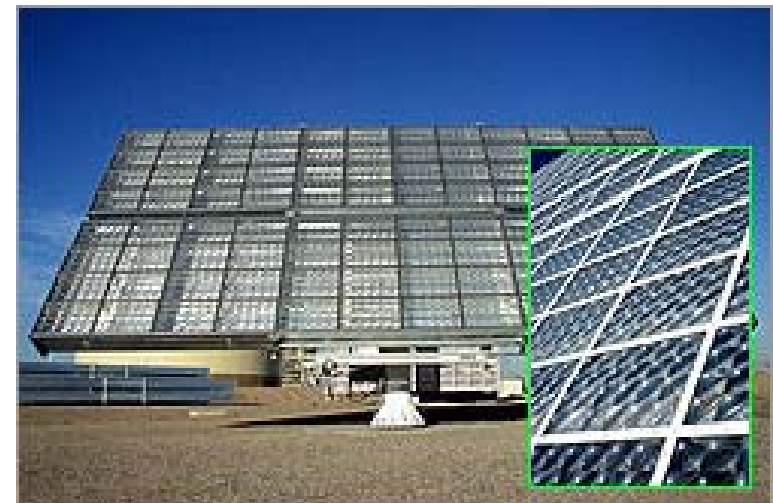


Photo by Enricoros

Si ingots and wafers



Shanghai Panmeng Technology Material Co., Ltd

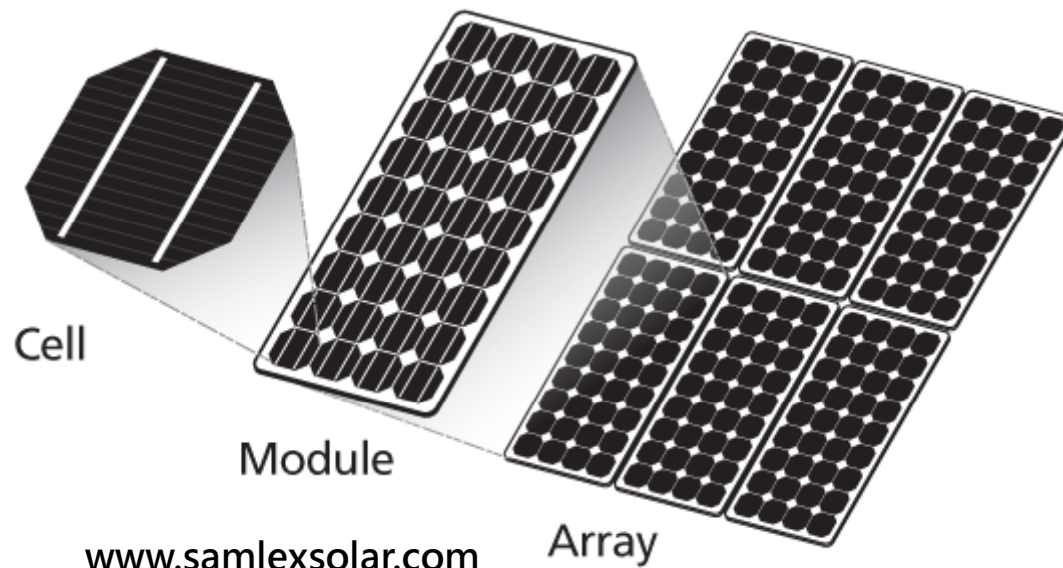

Advantages and disadvantages of Si solar cell

Advantages:


- High power conversion efficiency (single crystalline Si~ 25% 、poly crystalline Si~20.4% , amorphous Si~10.1%)
- Long term stability

single crystalline



www.gintechenergy.com

poly crystalline

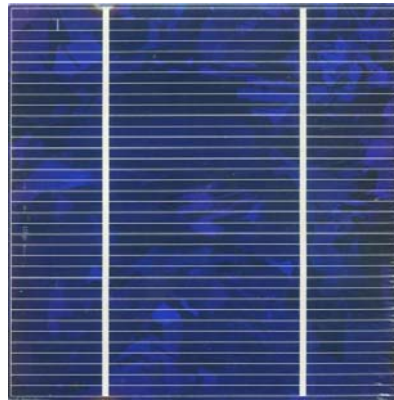

www.toufen.haibao.com.tw

amorphous



www.hkscipo.com


Disadvantages:

- High cost in material and fabrication process



2nd generation : Thin film solar cells

- CuInGaSe_2 , CuInS_2 ...
 - High absorption coefficient
 - Vacuum or non-vacuum process
 - Lower cost compared to Si based PV
 - Flexcell (Swiss), Nanosolar (U.S.A), Daystar (U.S.A), Sulfurcell (Germany), TSMC (Taiwan)

TSMC CIGS

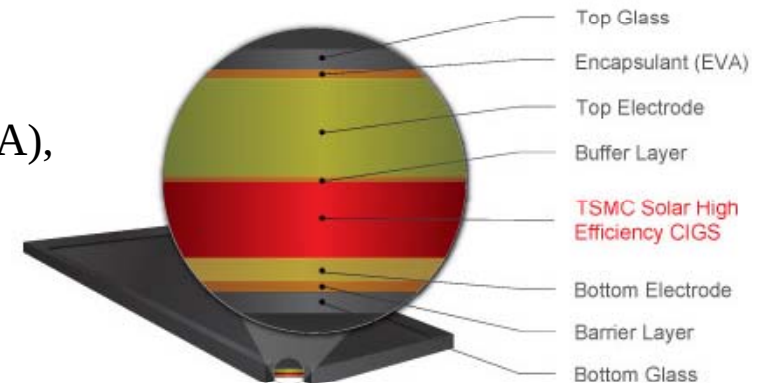

Absorption coefficient and material band gap

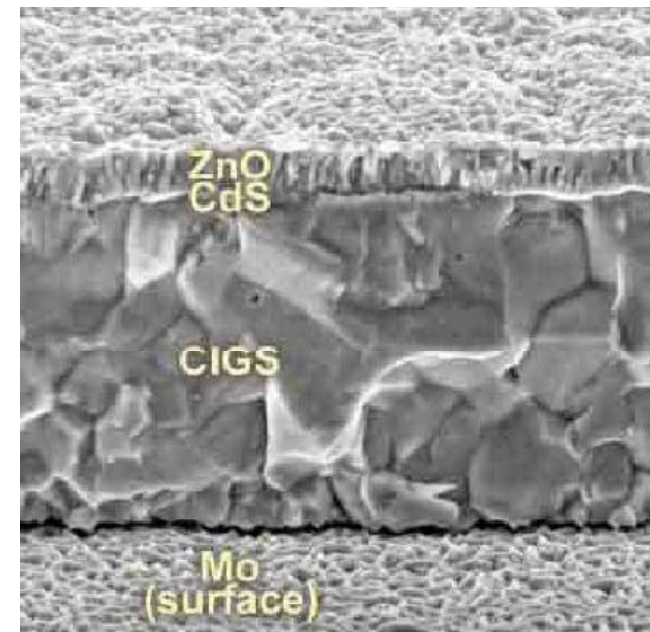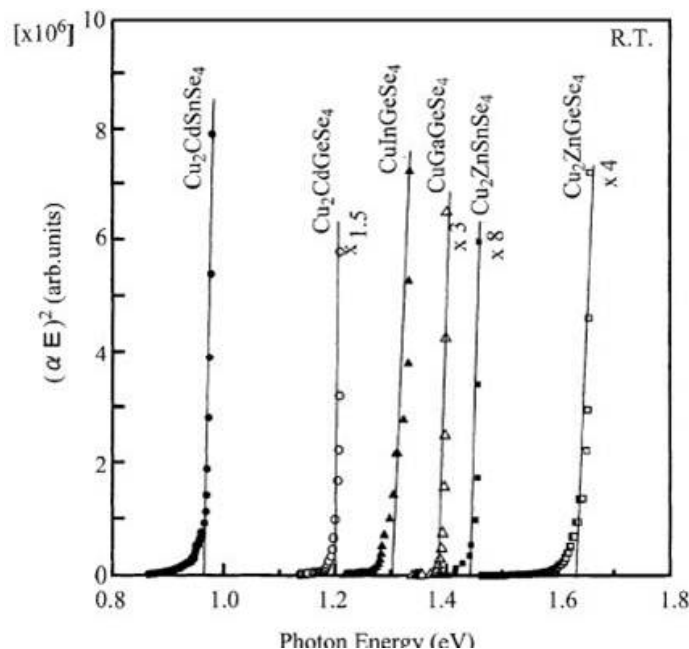

Advantages and disadvantages of thin film solar cells

Advantages:

- High absorption coefficient
- Ink-jet printing
- roll-to-roll fabrication
- Low cost substrate (Cu tape)




Flexible CIGS PV

Roll to roll process

www.nanotechweb.org
www.greentechmedia.com

Disadvantages:

- Contamination from fabrication process
- Rare metals (Se, In, Te)

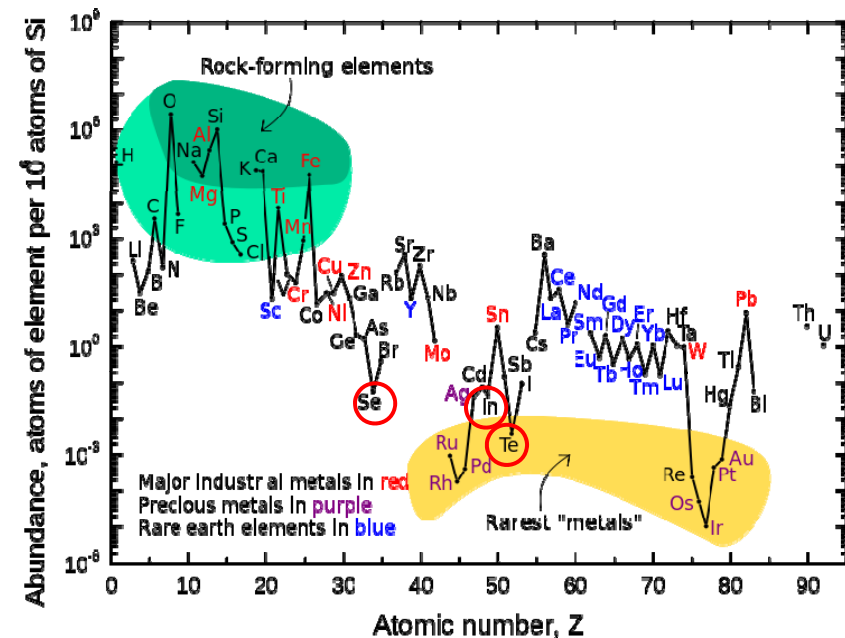



3rd generation : Organic solar cells

1. Dye-sensitized solar cell (DSSC)

2. Polymer solar cell

- Organic materials
- Solution-process
- Simpler fabrication process
- Lowest cost

spin-coating

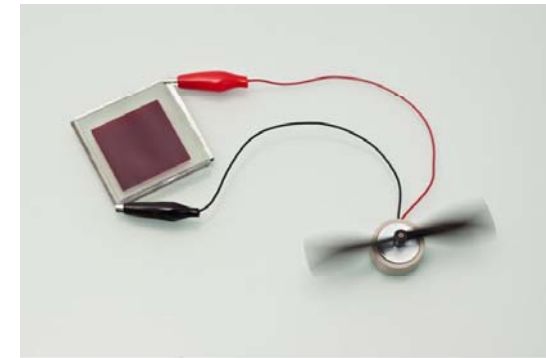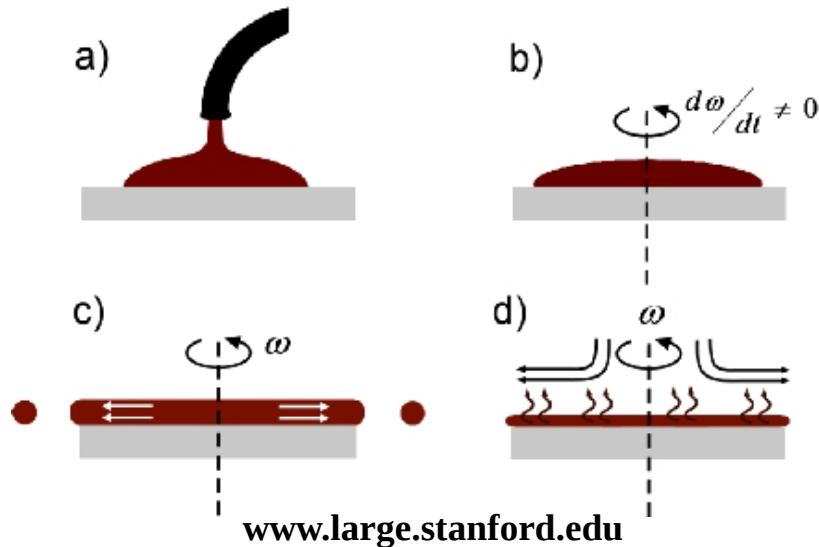


www.worldimprovement.net







www.pennenergy.com

Device structure of DSSC

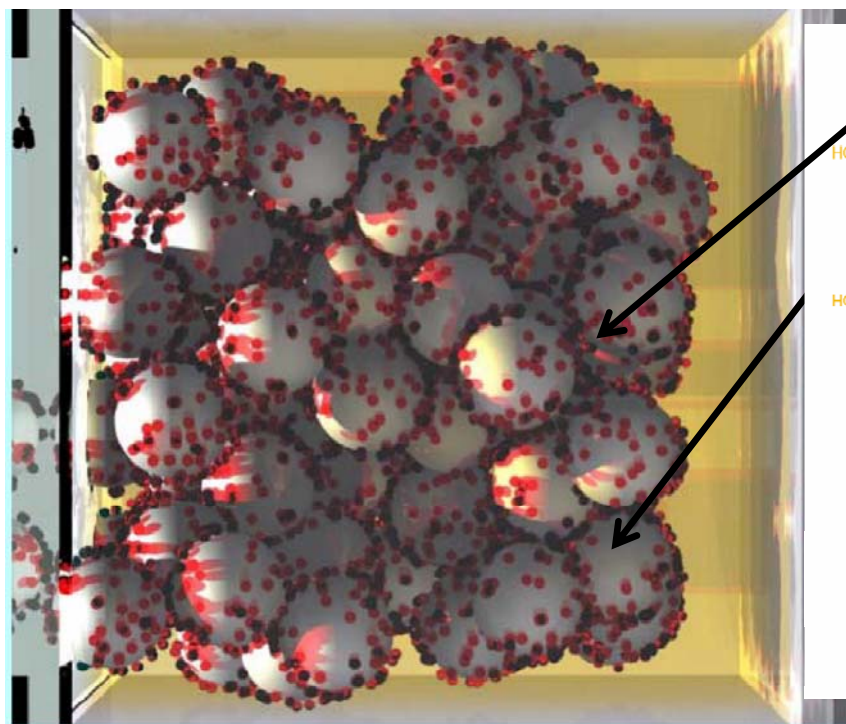

Courtesy of Dr. Arthur J. Frank, NREL, USA


Dye



RuL_3




$\text{cis-RuL}_2(\text{NCS})_2$




$\text{RuL}'(\text{NCS})_3$

www.ipc.uni-stuttgart.de
Inorg. Chem. 2005, 44, 6841-6851

Working principles of DSSC

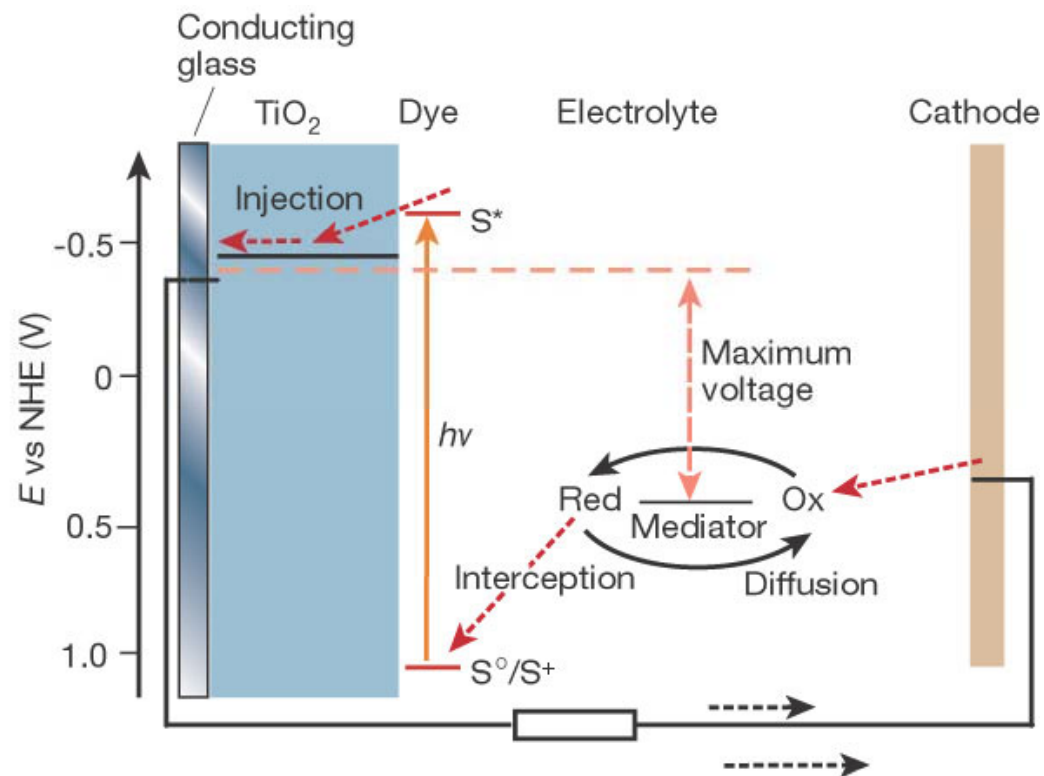

Grätzel cell

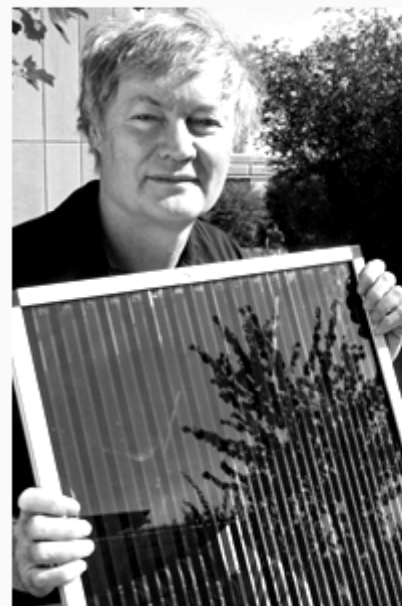

MICHAEL
GRÄTZEL

Professor, Director of the
Laboratory of Photonics
and Interfaces, Ecole
Polytechnique Fédérale de
Lausanne (EPFL)
Switzerland

www.technologyacademy.fi

Products of DSSC

Decorations

Solar window



www.devindra.org




www.hitechreview.com

Disadvantages of DSSC



- Liquid electrolyte (low temperature and long term stability)
- High cost, Ru (dye) and Pt (electrode)

Solid-state DSSC

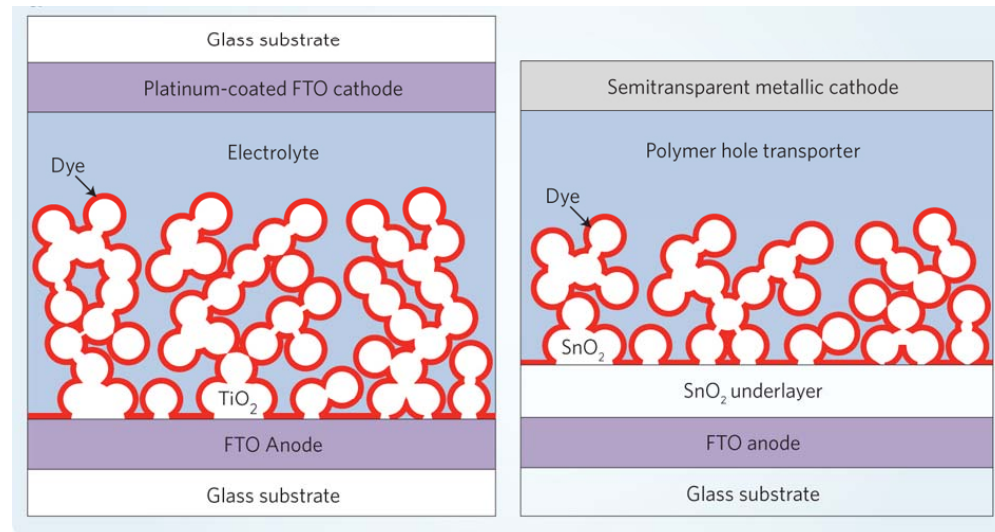

Nadya Anscombe, *Nature Photonics* 5, 266–267 (2011)

Porphyrin

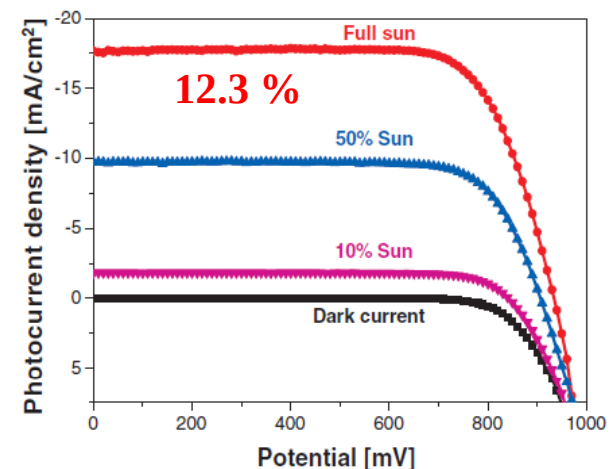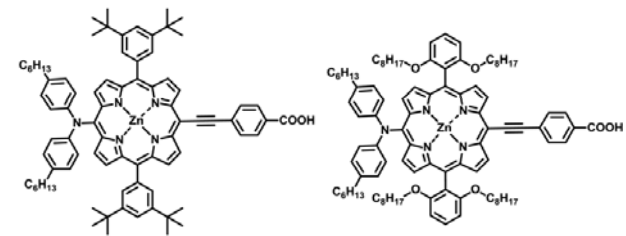


Yella, A. et. Al., *Science* 334, 629 (2011)

Polymer solar cells


- Solid active layer
- Light weight and high flexibility
- High transparence (active layer~100 nm)
- Ink-printing
- Large area and low cost fabrication

Roll-to-roll process

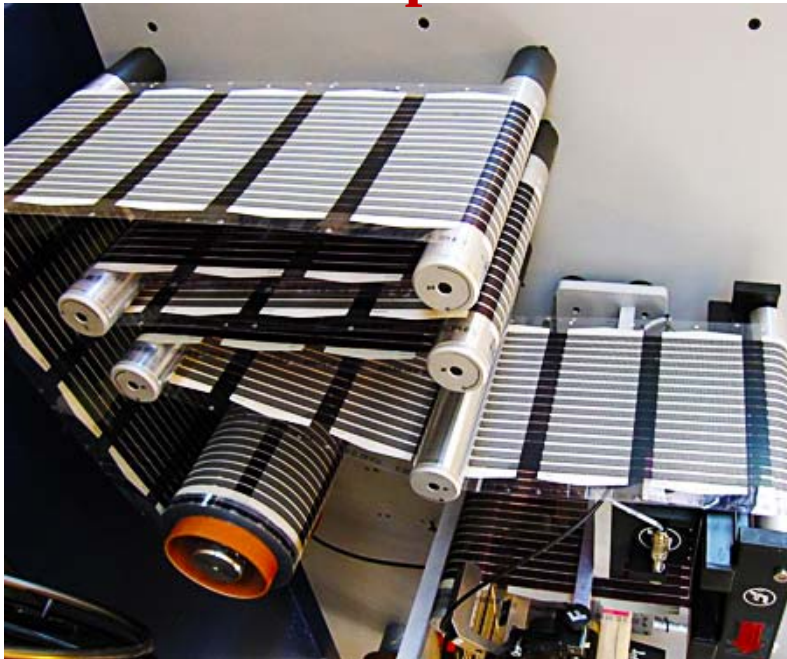

www.nanotechwire.com

Flexible polymer solar cell

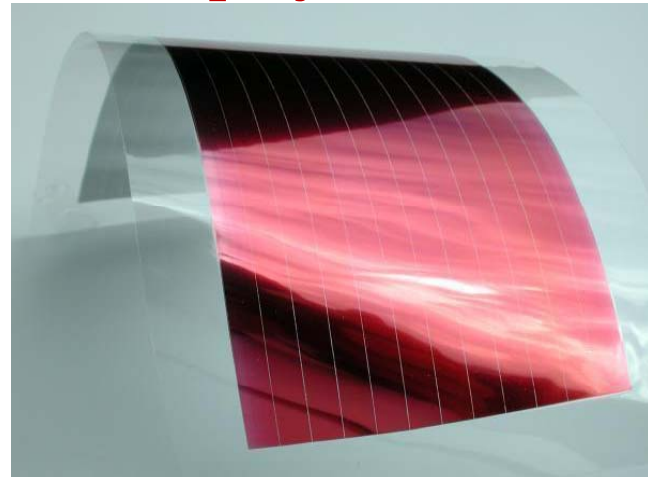

www.nanotechwire.com


Working principle of polymer solar cell

Exciton diffusion

Charge separation

Charge transport

Charge collection

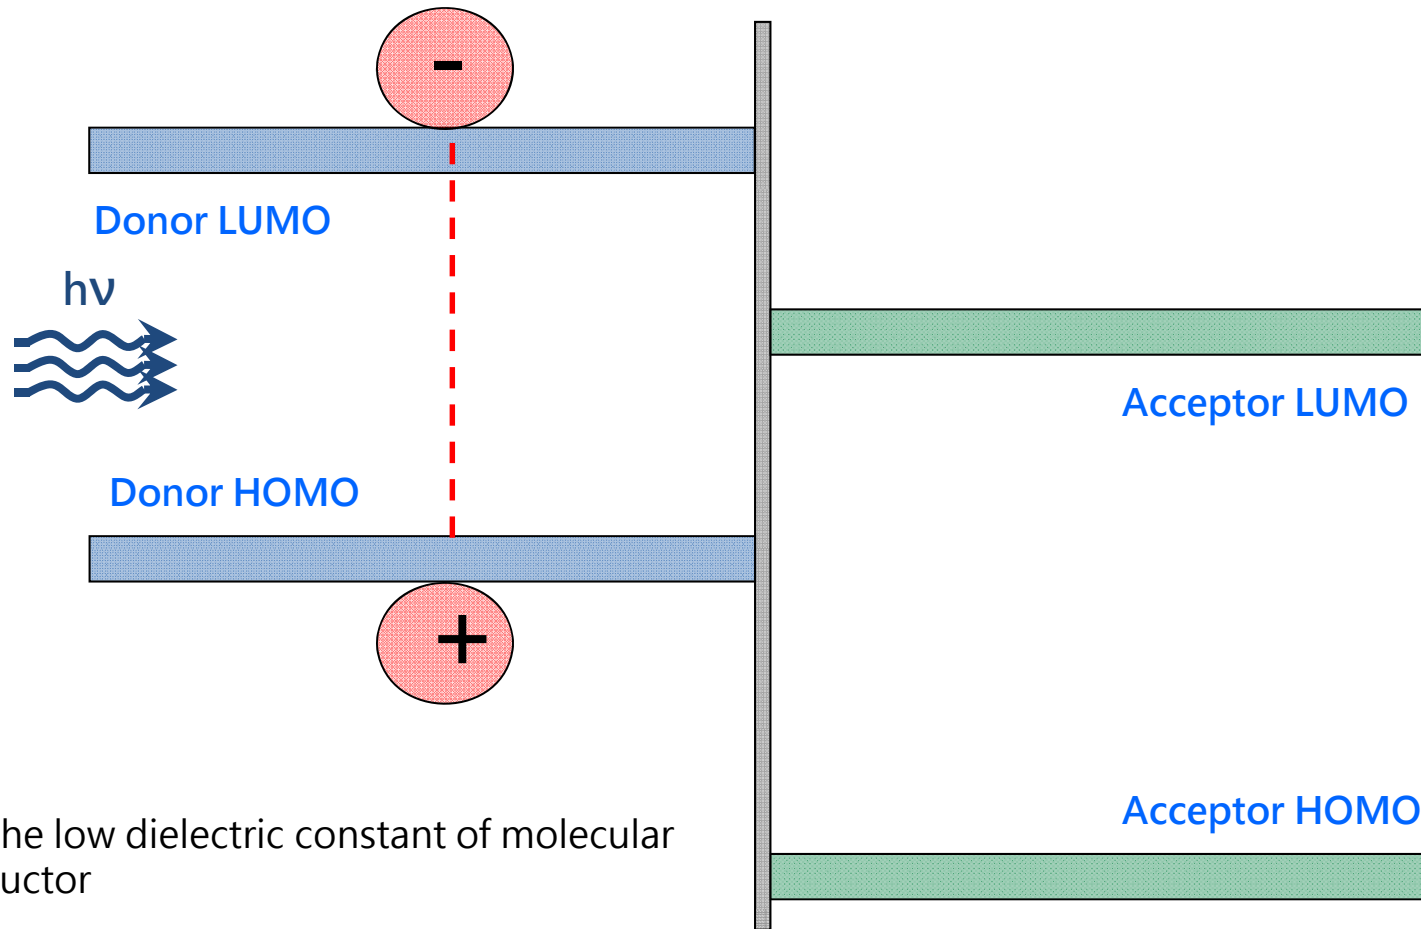


1. Due to the low dielectric constant of molecular semiconductor

2. Due to the short exciton diffusion length < 20 nm


Bulk heterojunction structure

Bulk heterojunction (BHJ)

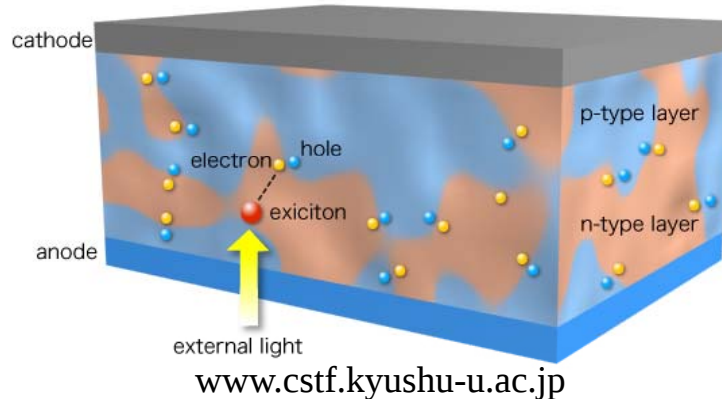


Electron donor material and electron acceptor material are mixed

Polymer-fullerene

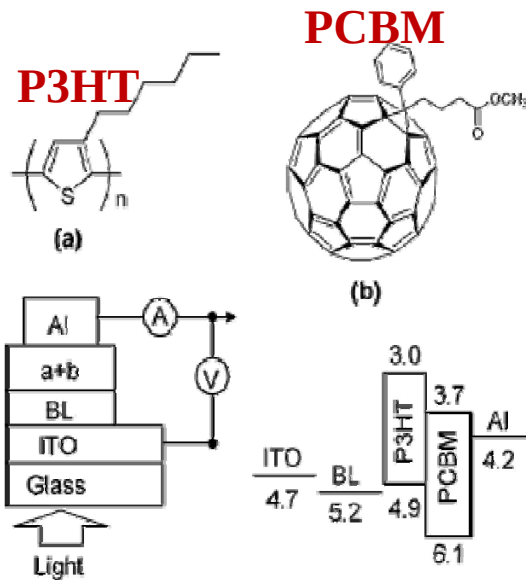


A. J. Heeger et al.

Polymer-inorganic

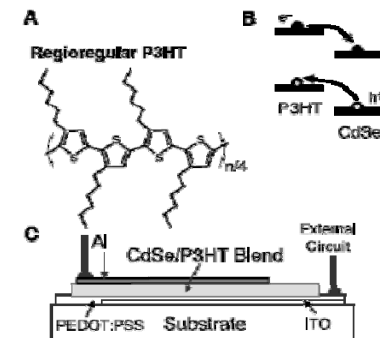


CdSe nanocrystal

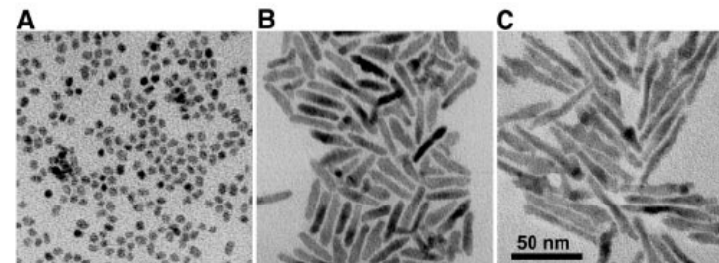

A.P. Alivisatos et al., 2002, SCIENCE, 295, 29


3D scanning transmission electron microscopy (STEM))

Electron tomography of P3HT/TiO₂ hybrids




TiO₂ nanorod
(NR)
4nm x 20nm

TiO₂ nanoparticle
(NP)
5nm x 5nm




STEM-HAADF electron tomography

Phase separated domain

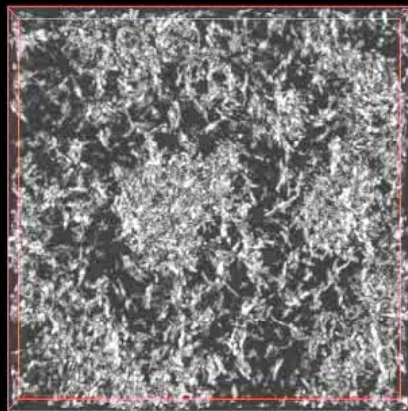


More dispersed

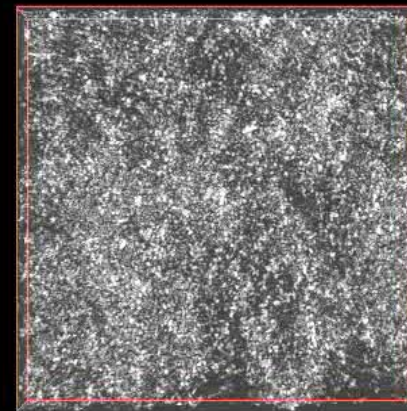


3D scanning transmission electron microscopy (STEM))

Electron tomography of P3HT/TiO₂ hybrids




TiO₂ nano rod
(NR)
4nm x 20nm


TiO₂ nano particle
(NP)
5nm x 5nm



STEM-HAADF electron tomography (2 Å resolution)

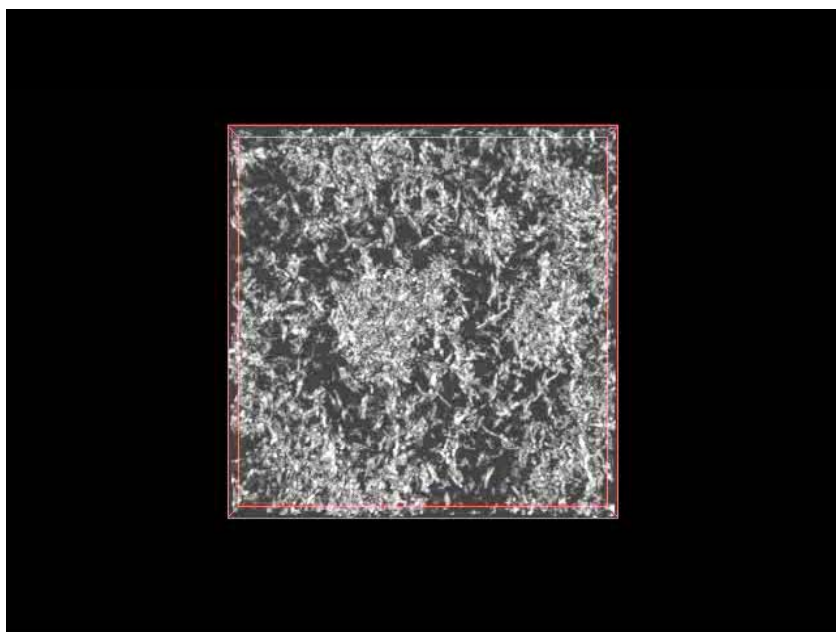


Phase separated domain

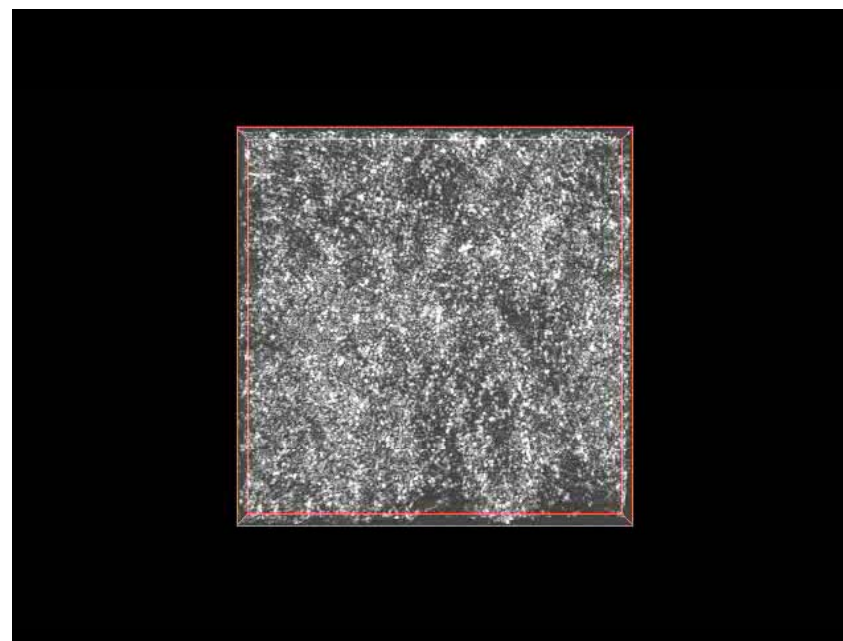

Applications of polymer solar cells

Portable electronics

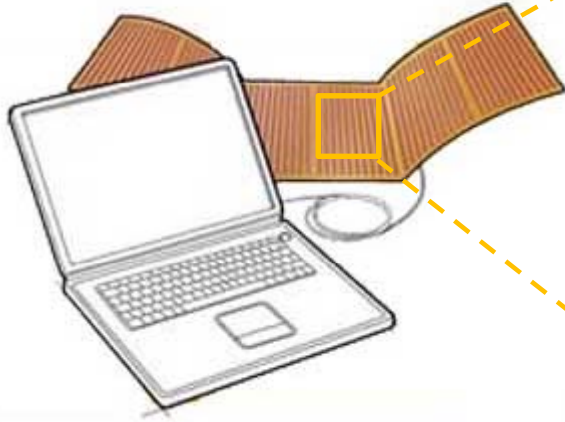

www-g.eng.cam.ac.uk

backpacks



www.thebluemarble.org



Military tent



From Konarka Inc.

Large area fabrication of graphene (Chemical Vapor Deposition)



nature
nanotechnology

LETTERS


PUBLISHED ONLINE: 20 JUNE 2010 | DOI: 10.1038/NNANO.2010.132

Roll-to-roll production of 30-inch graphene films for transparent electrodes

Jong-Hyun Ahn and Byung Hee Hong *et al.**

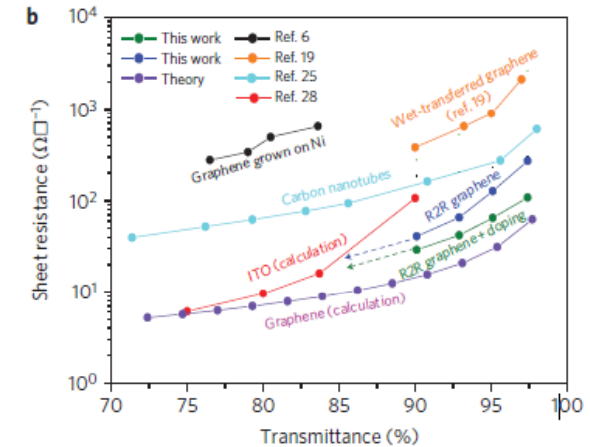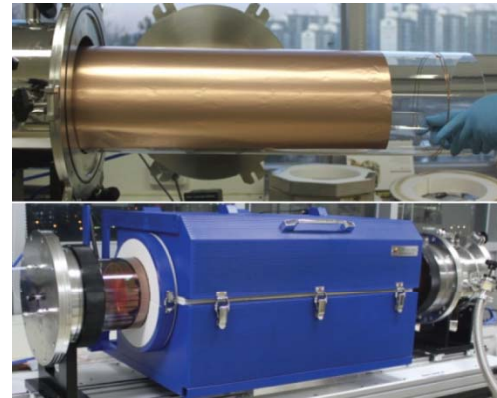


~30W /sq at ~90% transmittance

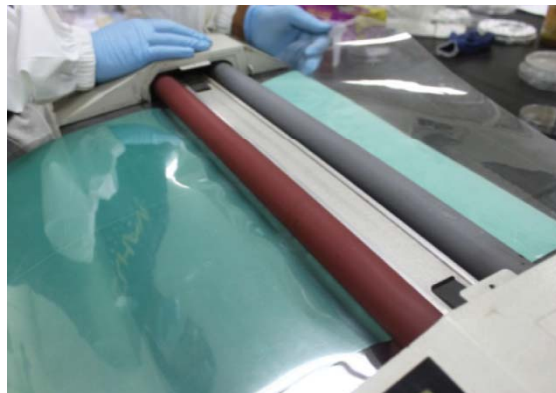

Roller printing






Scale up

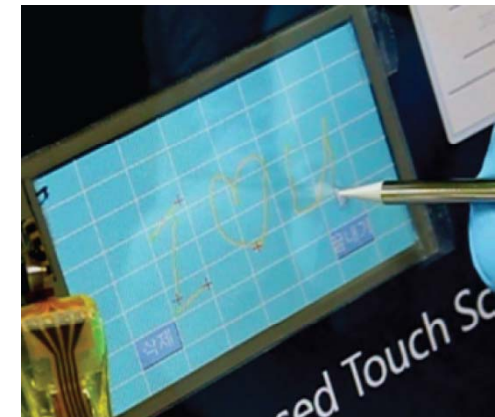

Touch panel

Bae *et al.* Nature Nanotechnology 5, 574–578 (2010)


Semi-transparent polymer solar cell with graphene electrode (solar window)

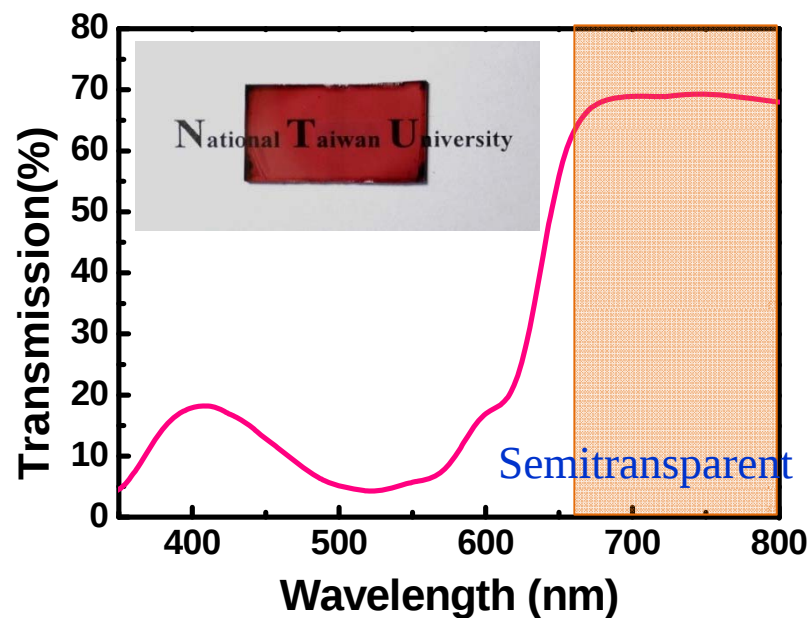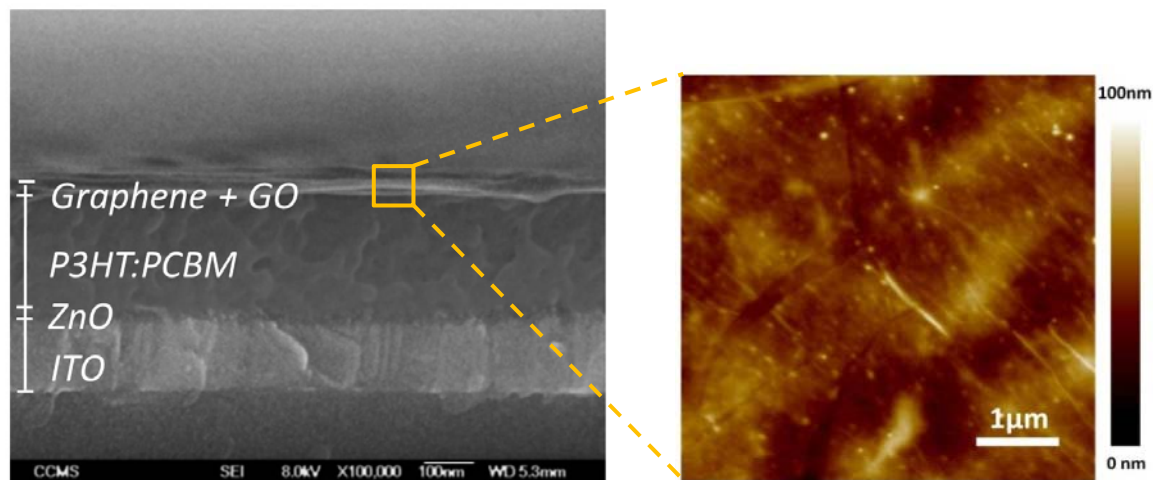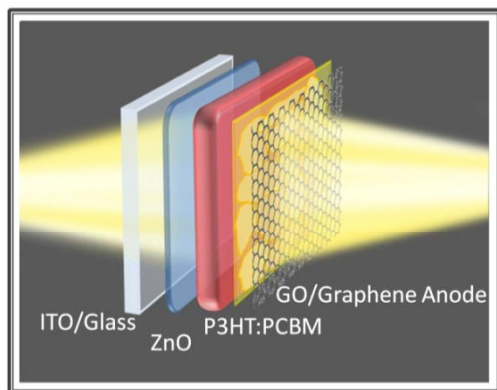


ACS Nano ,5,6564, (2011)

CNT transparent electrode (by solution process)




Carbon nano tube

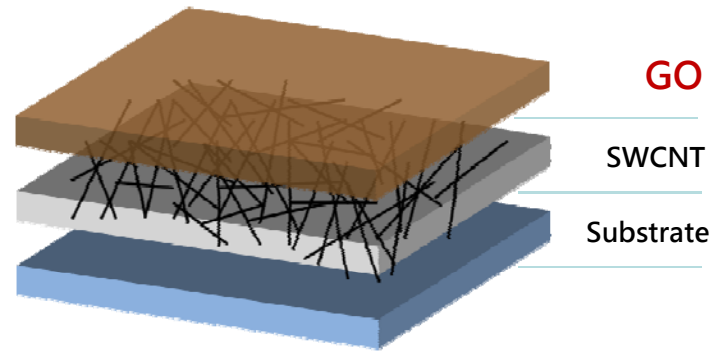


SWNT

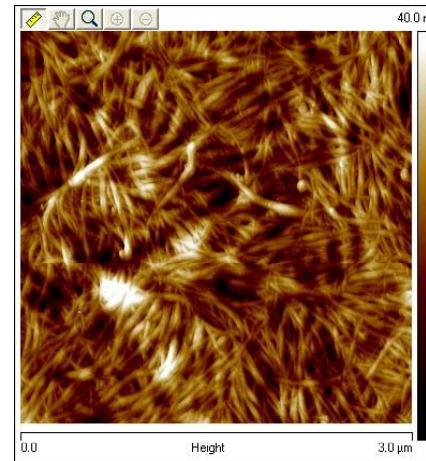


SWNT/GO

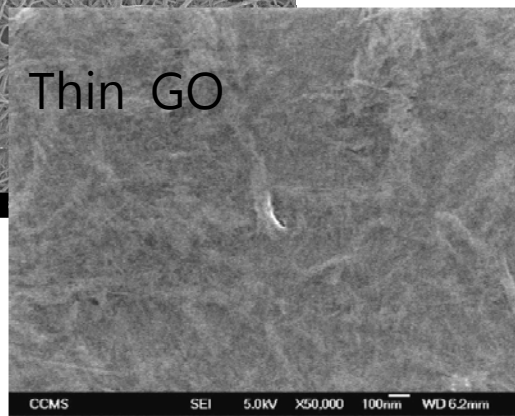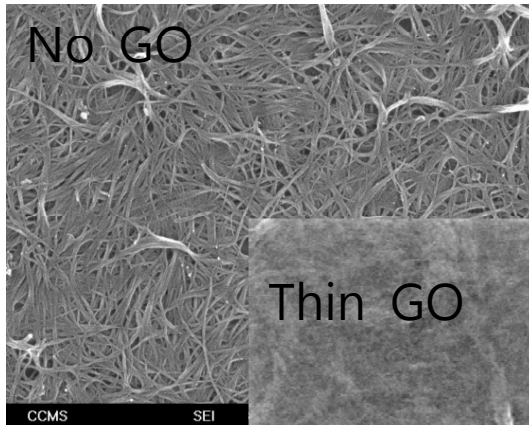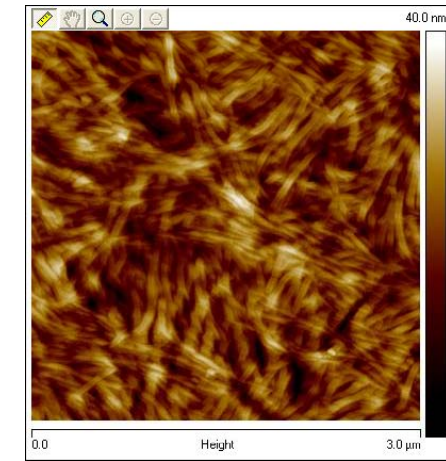

Protrusion into active layer

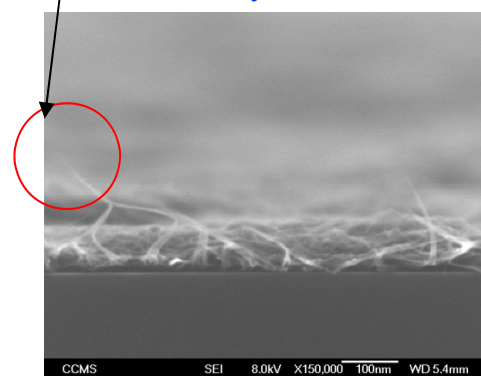

Planarize the surface

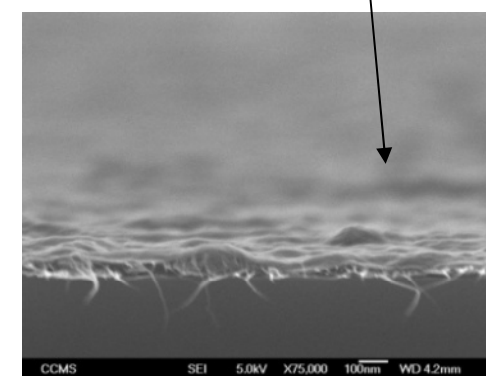



GO can planarize the SWNT surface

Without GO
Ra = 8.01 nm
 Φ = 4.92 eV

With GO
Ra = 4.20 nm
 Φ = 4.88 eV

Nanocarbon platform for polymer solar cell


“Cocktail” nanocarbon polymer solar cell !

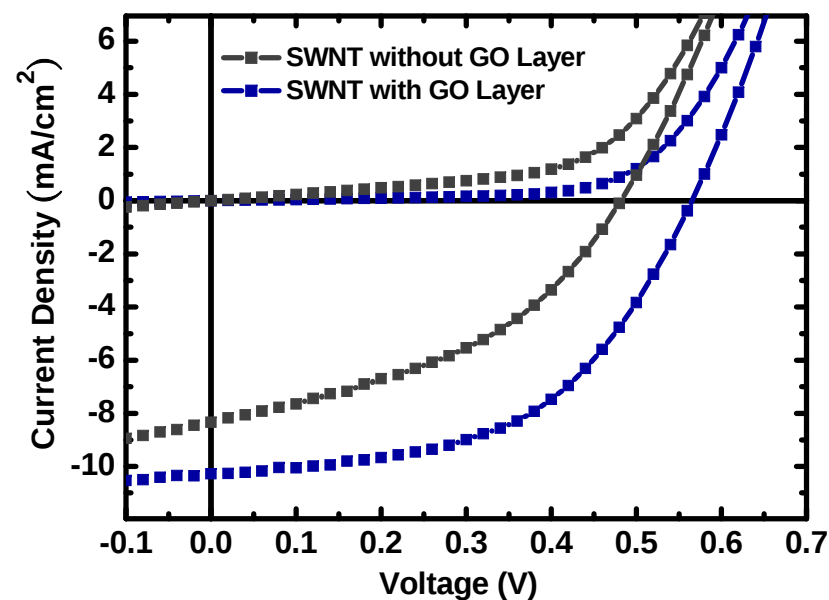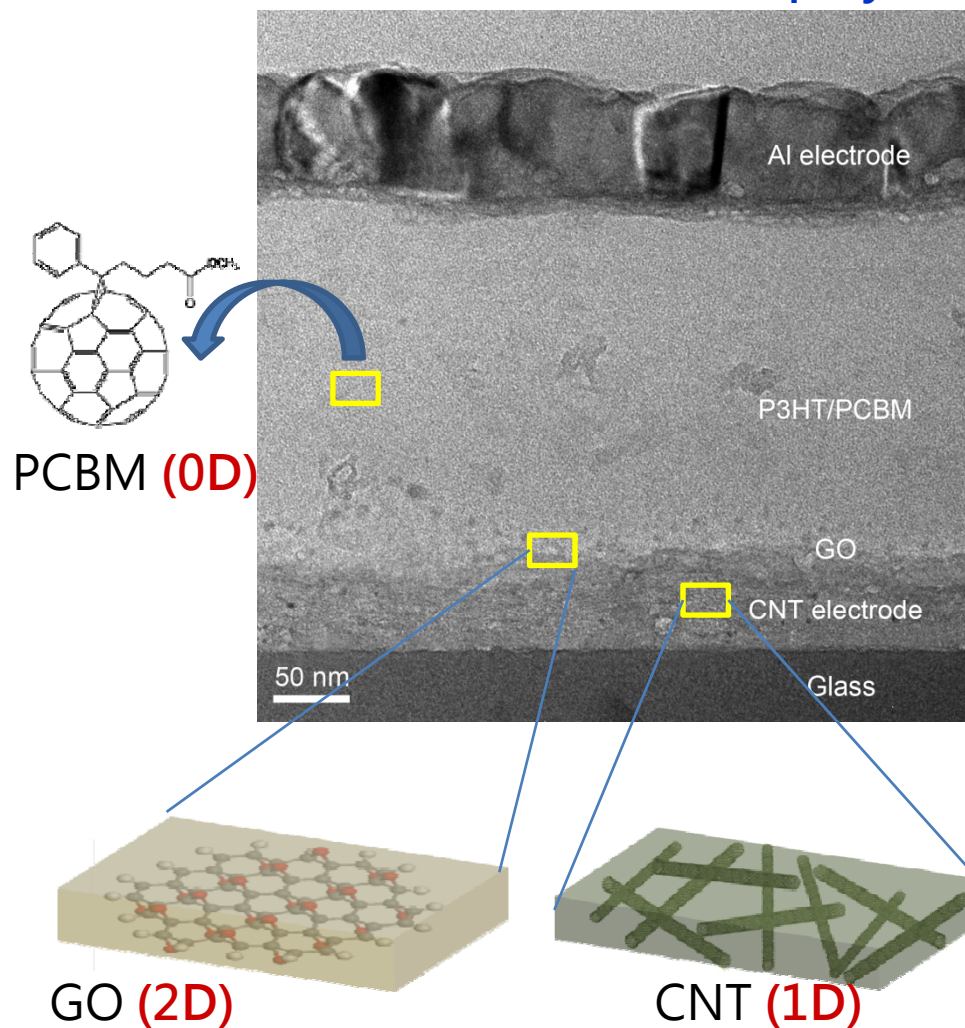


Quantum dot solar cells

- Size and band gap tunable
- Light weight and flexible
- NIR absorption
- Large area and low cost




Quantum dot




www.solarfeeds.com

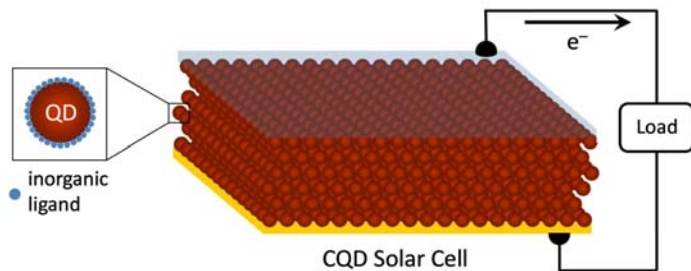


www.science.psu.edu

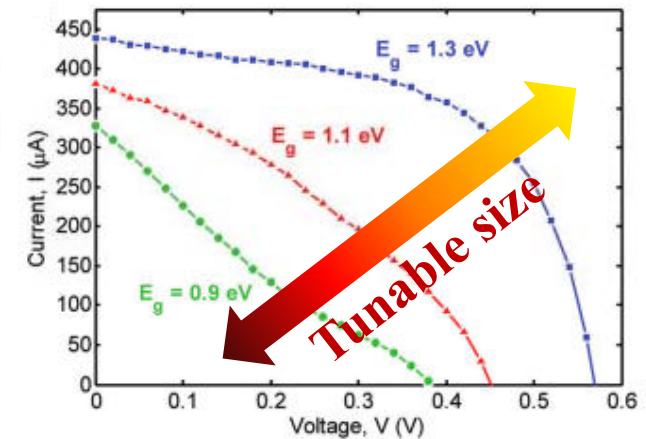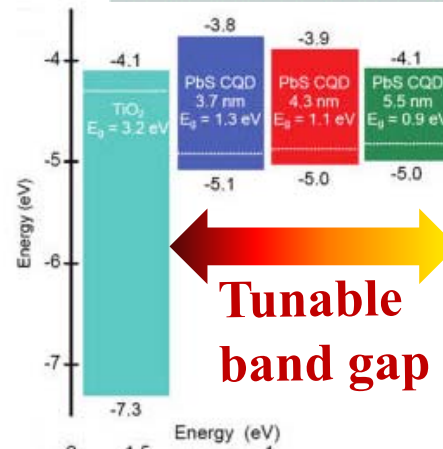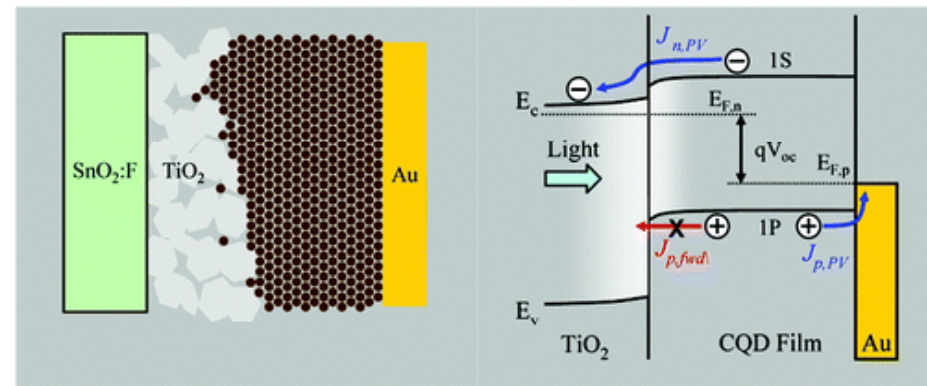

QD solar cell with double layer structure (CdTe-CdSe)

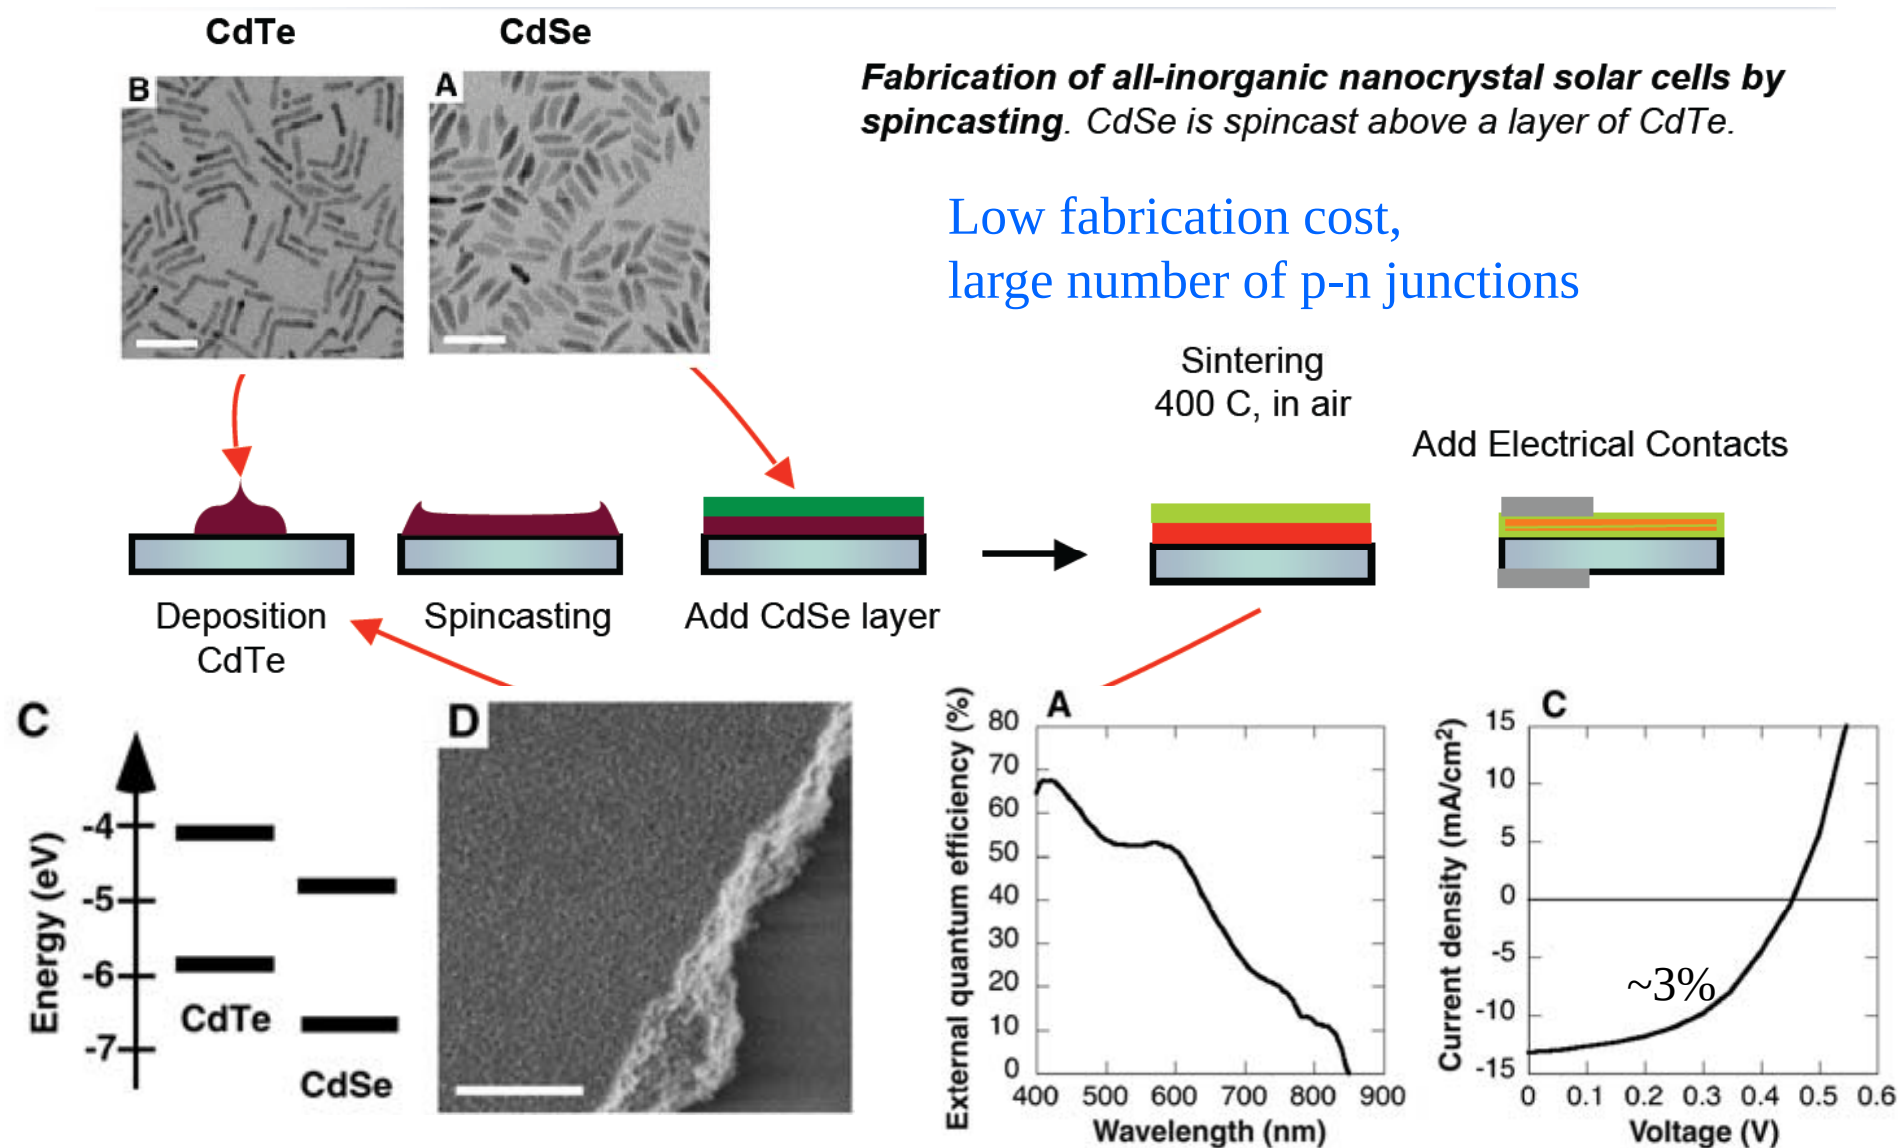


Anti-reflection nano-structures in solar cells

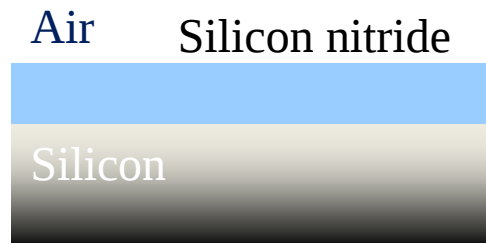


Single-layer
anti-reflective film



Multi-layer
antireflective films


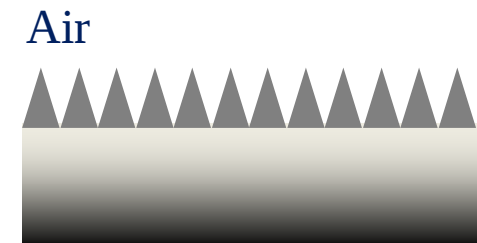


Antireflective Substrate

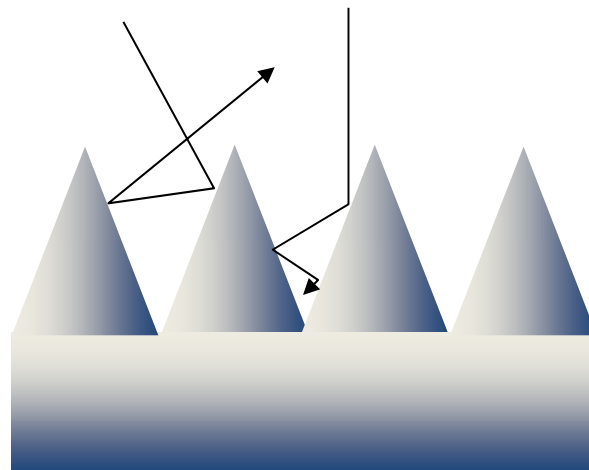

Fabrication of anti-reflection nanostructures


After RIE process

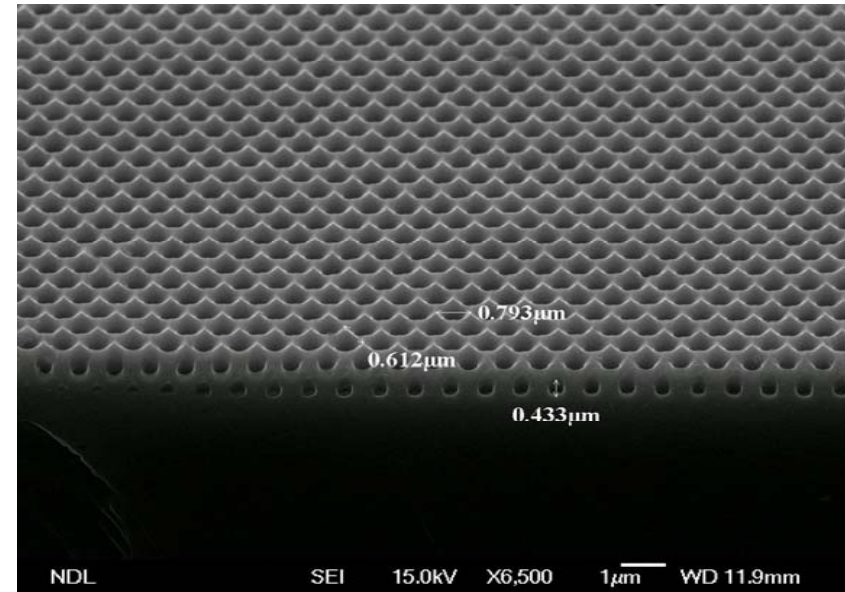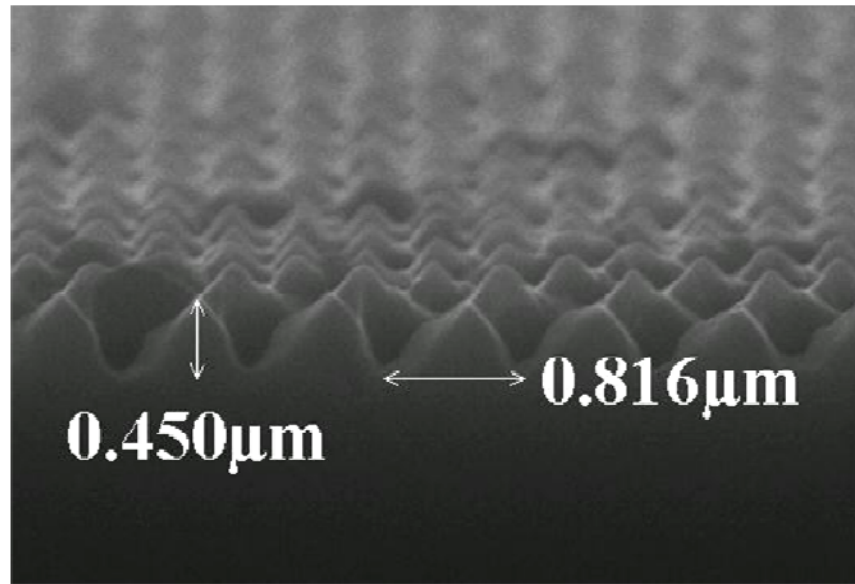

Courtesy of Prof. H. L. Chen,
Dept. of MSE, NTU

Fabrication of anti-reflection nanostructures


SEM images of colloidal lithography

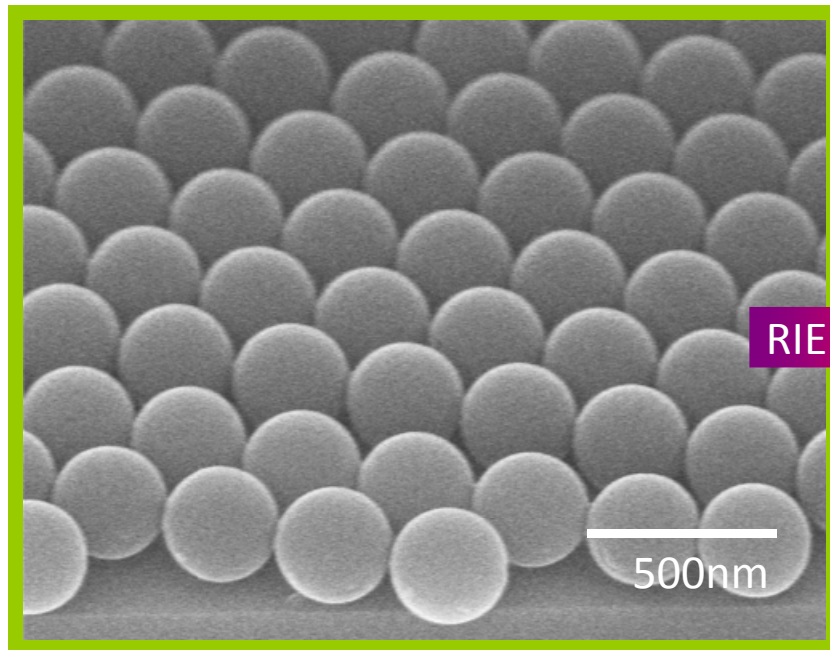

(a)

PS sphere size = 350nm

RIE 60s

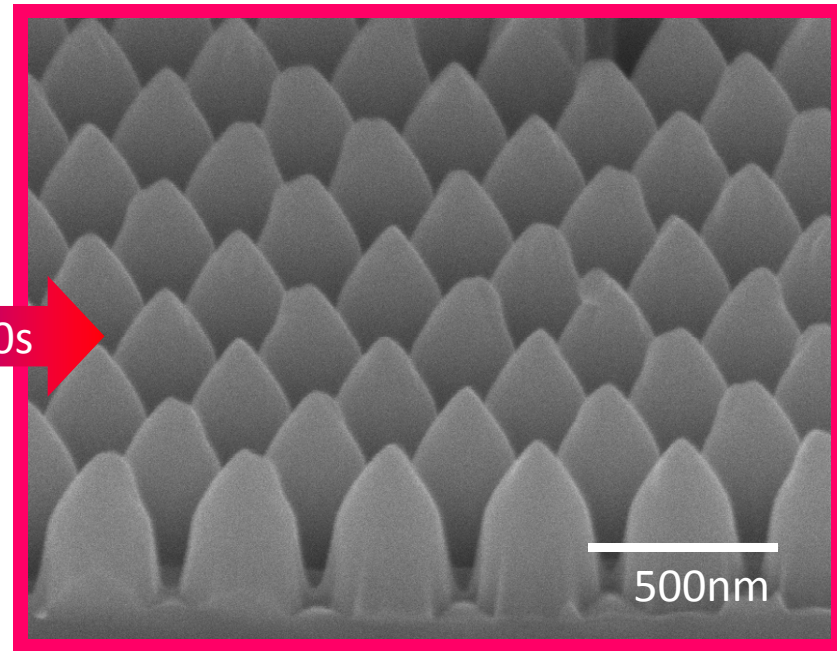


(b)


RIE: $\text{Cl}_2/\text{O}_2/\text{SF}_6 = 90/5/5$
Etching time: 60s

台大材料 陳學禮教授提供

Fabrication of anti-reflection nanostructure: Silicon solar cell

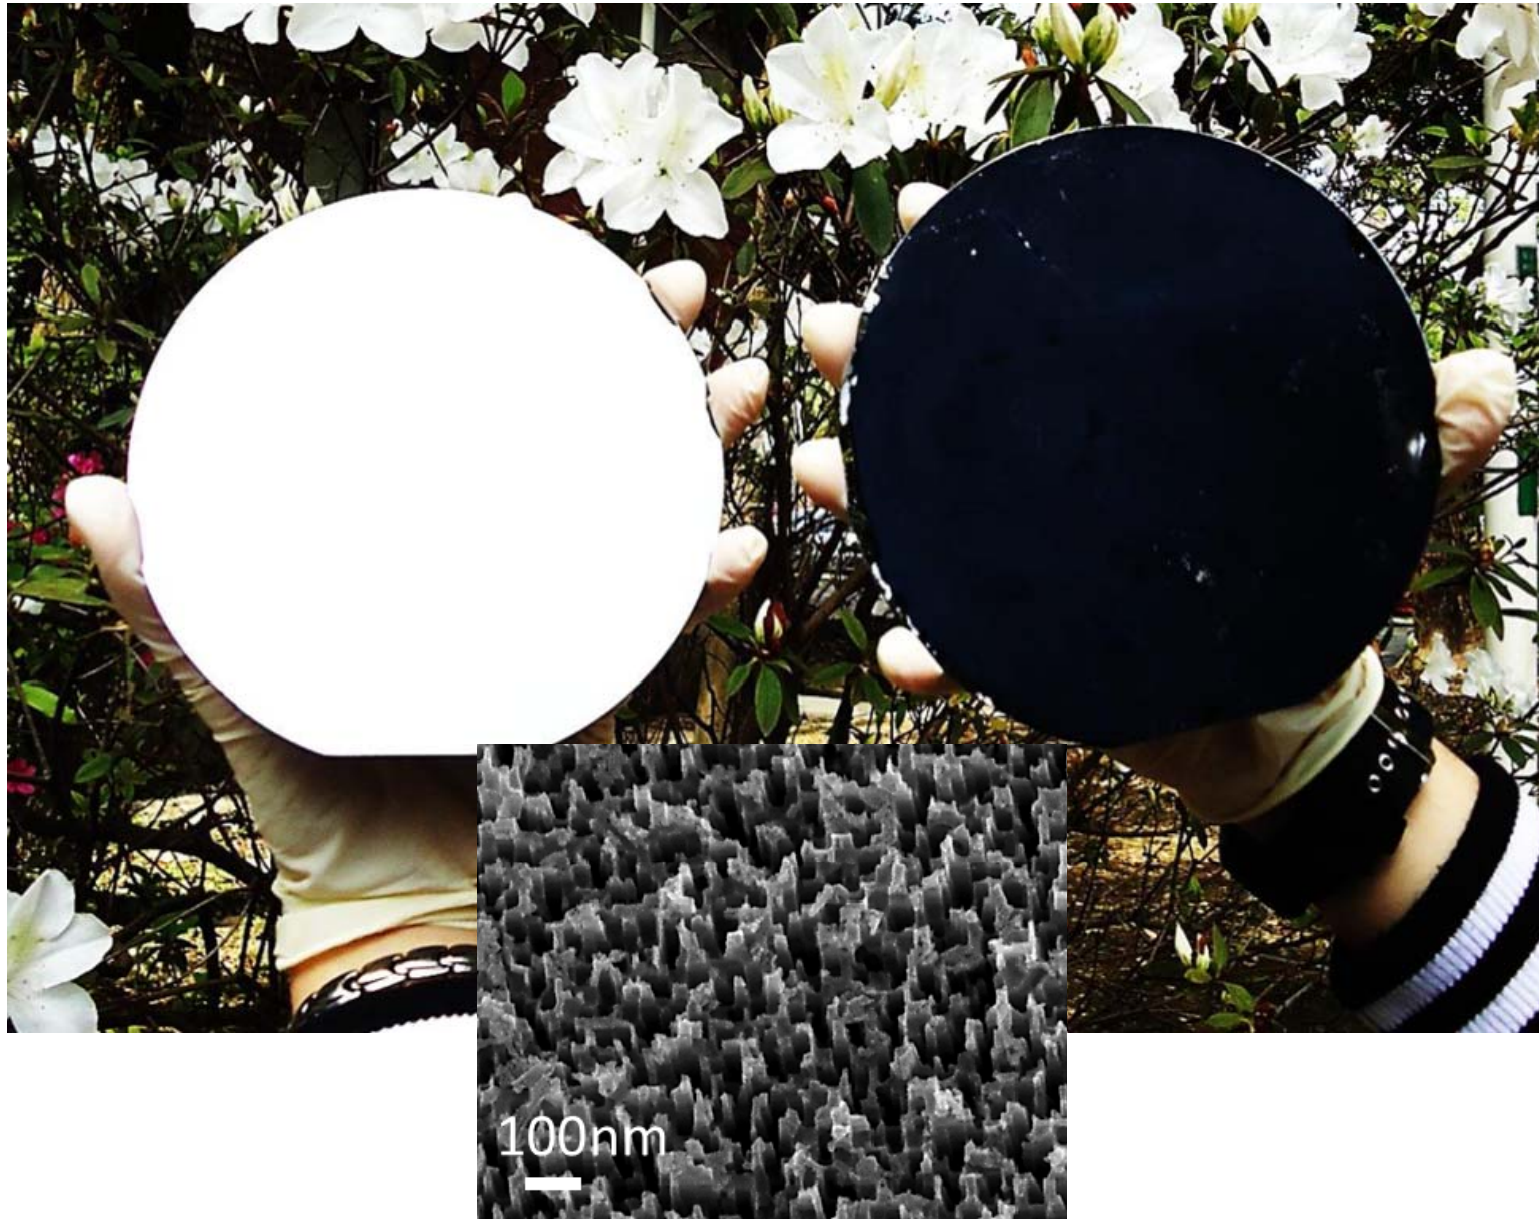

Hydrogen Fuel cell

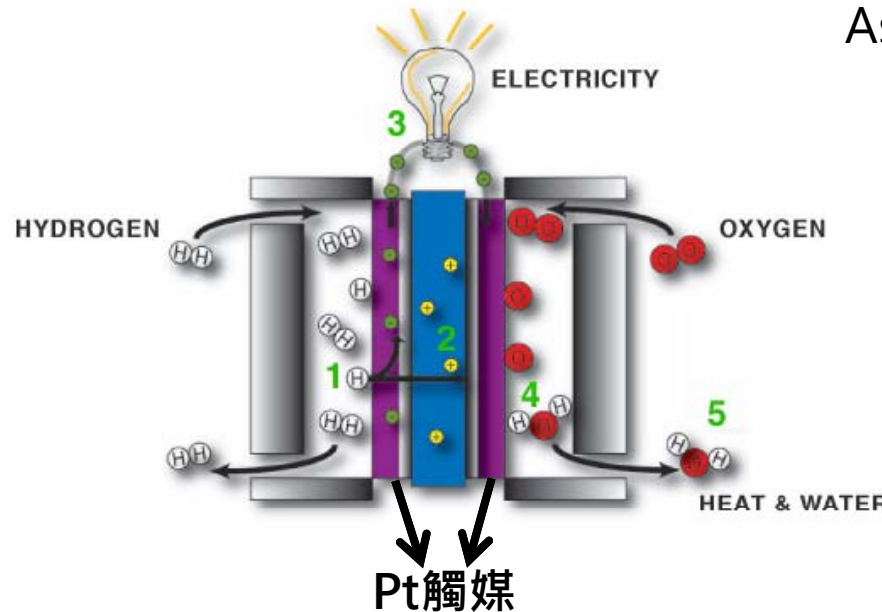

Assembly fuel cell



Advantages:


- non-polluting
- High conversion efficiency of electric energy
- renewable

However, noble metal is necessary. (Pt metal)

<http://www.greenspec.co.uk/fuel-cells.php>

- Anode: $2\text{H}_2 \rightarrow 4\text{H}^+ + 4\text{e}^-$
- Cathode: $\text{O}_2 + 4\text{H}^+ + 4\text{e}^- \rightarrow 2\text{H}_2\text{O}$
- Total reaction : $2\text{H}_2 + \text{O}_2 \rightarrow 2\text{H}_2\text{O}$

Total reaction potential $E_{\text{total}} = 1.2\text{V}$

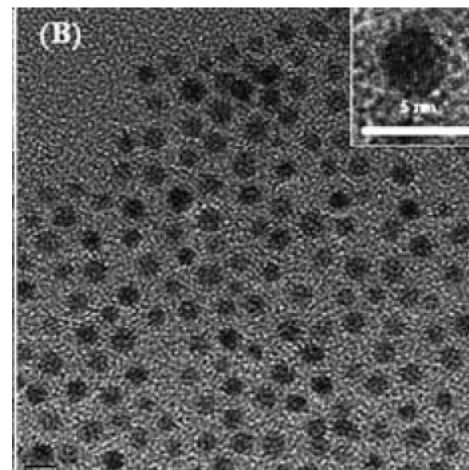


Catalysts: Pt nanoparticles

Nanoscale, 2010, 2, 573–581


Hydrogen Fuel cell Car




Direct Methanol Fuel cell

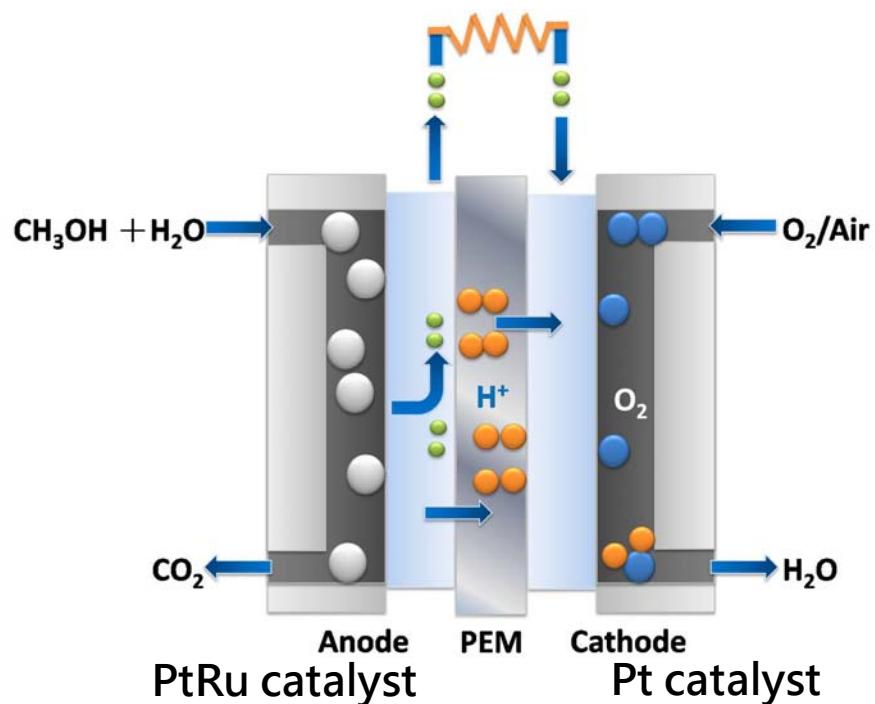



Different shape of nanocrystal catalysts

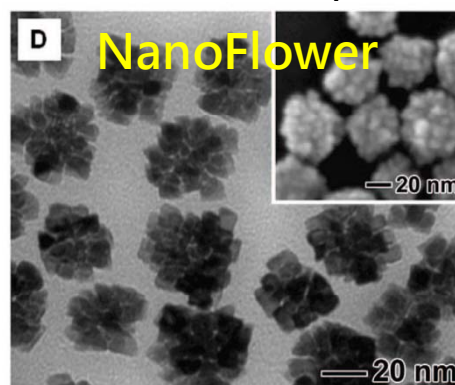

Lim, B. et. al., *Nano Lett.*, 2008, 8, 4043.

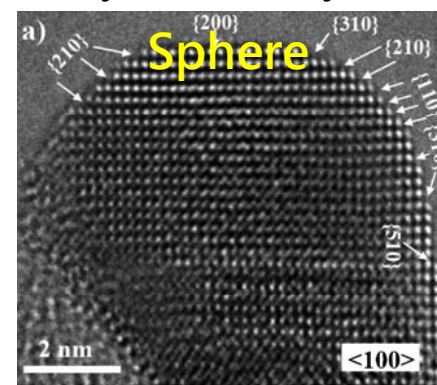


Zhou, Z. Y., et. al., *Angew. Chem. Int. Ed.* 2010, 49, 4771-4774.

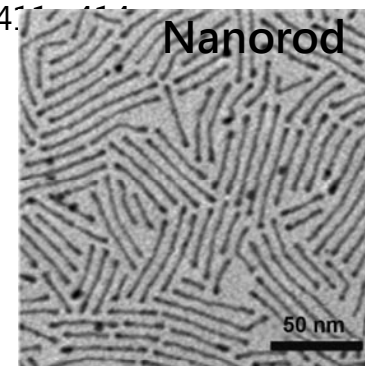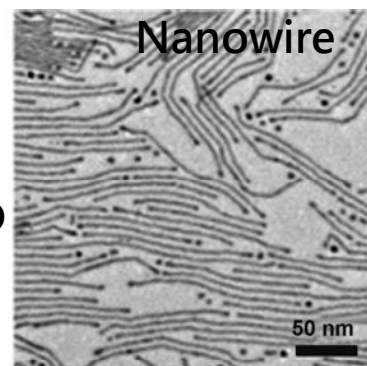


Wang, C., et. al., *Angew. Chem. Int. Ed.* 2007, 46, 1 – 4

Water splitting → H₂ production



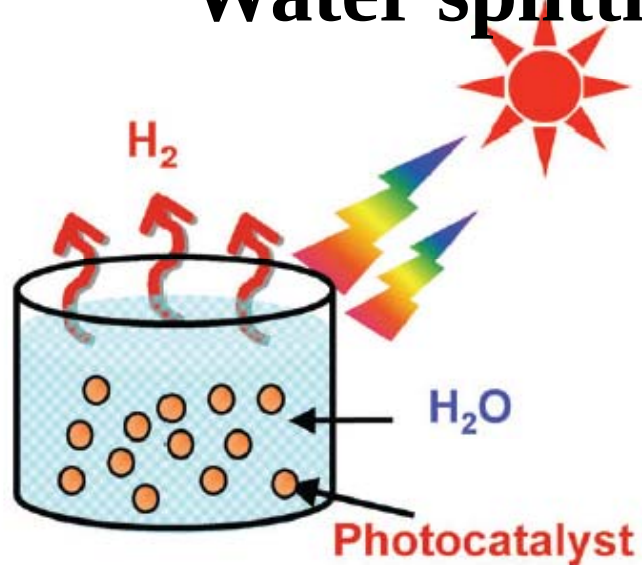


Light → Water splitting

→ H₂ production (Fuel cell)





Chem. Soc. Rev., 2009, 38, 253–278 | 255

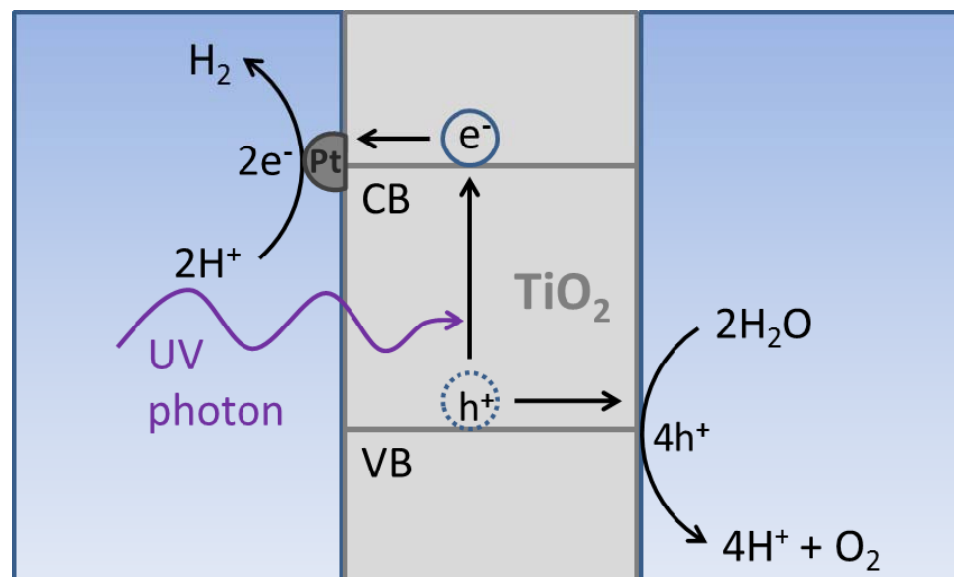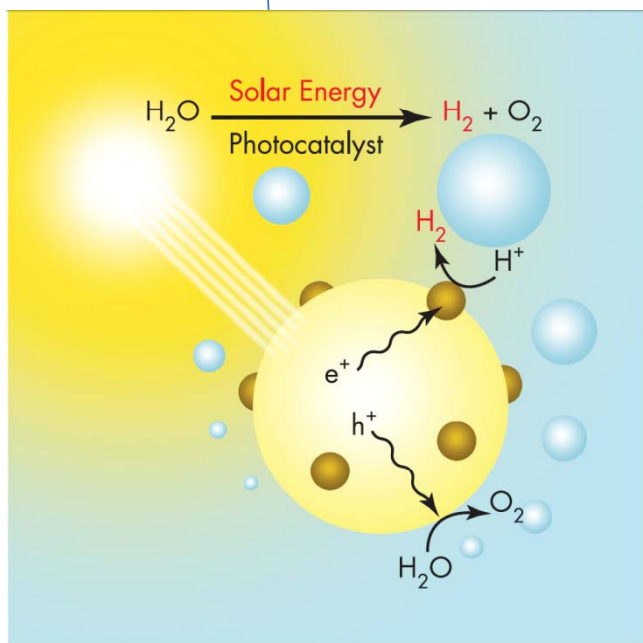


Nano-photocatalyst

Photocatalytic reaction under visible light $(\text{Ga}_{1-x}\text{Zn}_x)(\text{N}_{1-x}\text{O}_x)\text{-RuO}_2$


$(\text{Ga}_{1-x}\text{Zn}_x)(\text{N}_{1-x}\text{O}_x)\text{-RuO}_2$ Photocatalyst

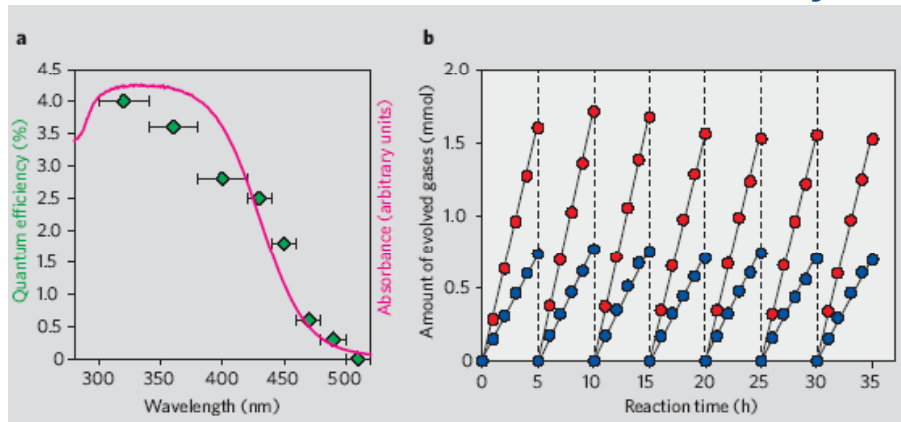

Under UV light

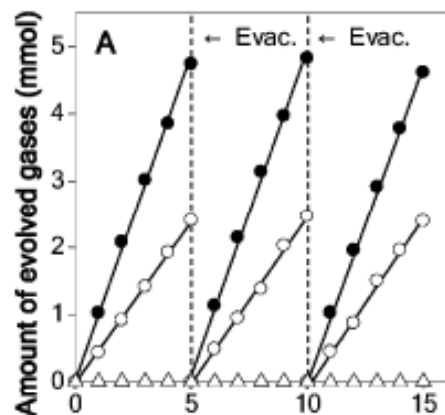




Under Visible light

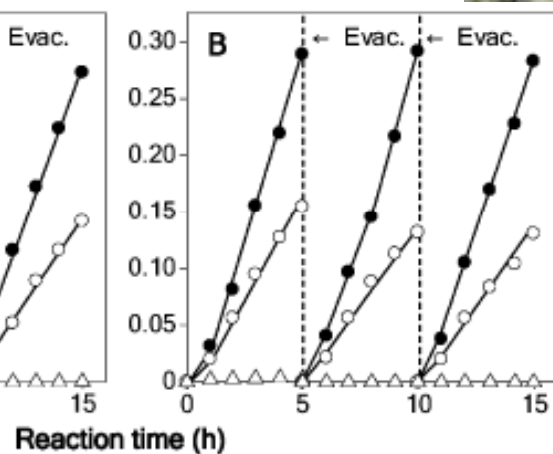

Maeda, K. et. al., Nature, 2006, 440,295.

Photocatalytic reaction under visible light (black TiO_x)

black TiO_x nanocrystals

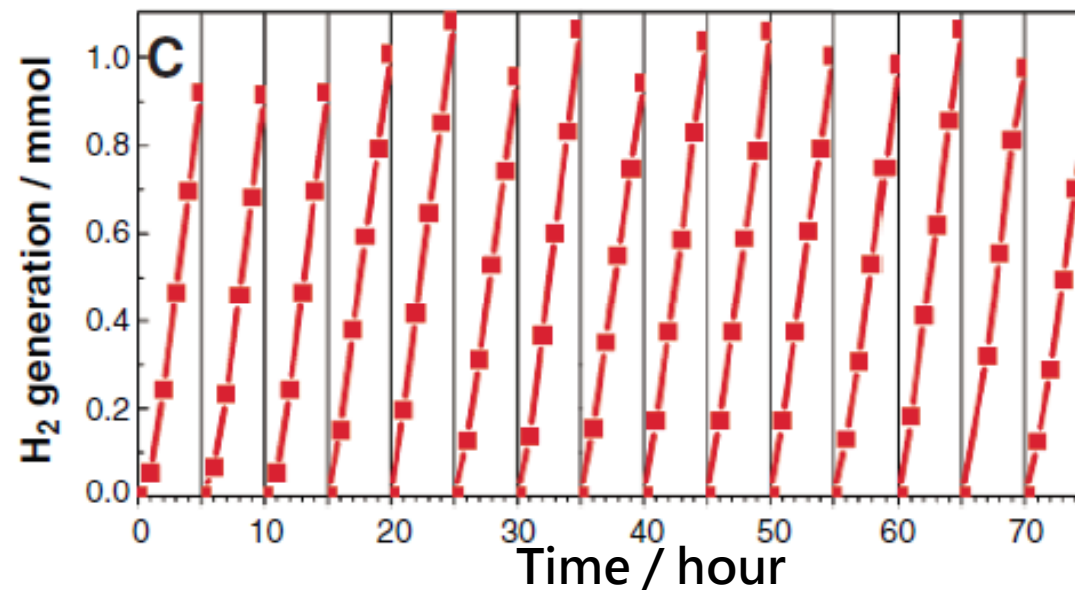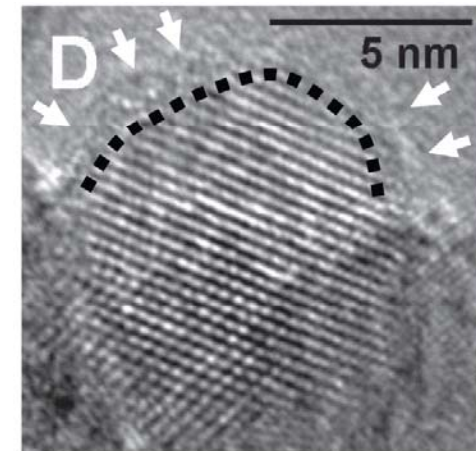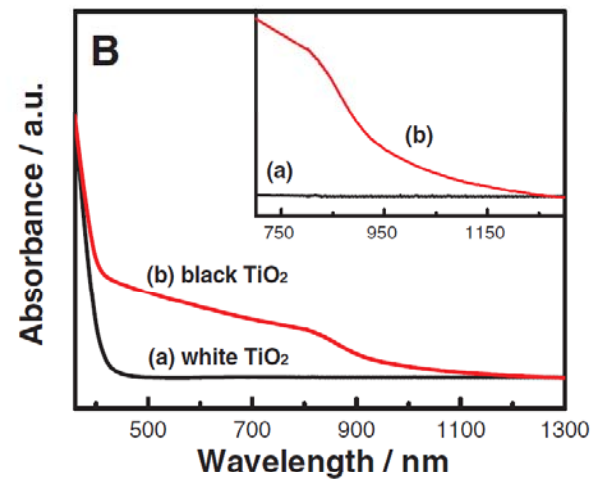

Conclusion

- Nano materials and technology play a very important role in the development of new energy in future.
- Nano materials and technology is a relevant interdisciplinary science including materials, physics, chemistry, electric engineering, biology.

Save our planet by Nanos



From WWF

Thank you for your attention !!